

R32 Hybrid Catalogue

Next Generation 2-Pipe VRF Heat Recovery Systems



CITY MULTI



VRF Now with R32 Refrigerant

Building owners, facility managers and the construction industry have been looking for HVAC systems that deliver high operational efficiency whilst minimising the global warming potential of the refrigerants used within these systems.





The Future-Proof VRF Solution Offering Simultaneous Heating and Cooling with Minimal Environmental Impact

With the environmental pressure on R410A refrigerant increasing, Mitsubishi Electric's commitment to reducing the environmental impact of air conditioning has seen the introduction of New Zealand's first VRF (Variable Refrigerant Flow) solution that has utilised R32 refrigerant.

Mitsubishi Electric has long been a pioneer in the world of air conditioning and the world's first R32 Hybrid Product Range puts the company at the forefront of the industry.

The system utilises the low Global Warming Potential (GWP) refrigerant R32, providing a real solution that delivers high operational efficiency whilst minimising the GWP of the refrigerants used within these systems.

R32 Hybrid is the World's Only Low GWP 2-Pipe Hydronic Heat Recovery System

The Mitsubishi Electric R32 Hybrid solution is an evolution of Mitsubishi Electric's R410A Hybrid System. First introduced in 2014, this unique 2-Pipe System combines VRF and chiller technologies using water throughout the majority of the pipework to efficiently transfer simultaneous heating and cooling to different spaces.

By using water as the heat transfer fluid for the majority of the air conditioning system, R32 Hybrid minimises the overall amount of refrigerant charge in the system.

Furthermore, with only water circuits connecting to the indoor units, R32 Hybrid minimises the need for leak detection. Offering significant reductions in on-going maintenance and installation costs in the controlled space that would be needed to comply with AS/NZS 5149. (1-4) 2016.

All the Benefits of VRF with Significantly Lower GWP

The 2-Pipe R32 Hybrid System offers the same comfort levels normally associated with 4-pipe fan coil systems. In addition, the system also features the same design flexibility, operational efficiency and advanced control that Mitsubishi Electric traditional VRF is renowned for.

Because Hybrid now also incorporates R32 refrigerant, it delivers a VRF system with a significantly lower Global Warming Potential (GWP) than existing solutions.

In fact, the shift from R410A to R32 refrigerant realises a massive 66% reduction in Global Warming Potential.

R32 Hybrid is the New VRF Standard

Since 2015, Hybrid applications have already enjoyed significant growth in New Zealand, successfully incorporated in a variety of designs ranging from offices, hotels, retirement villages, education facilities, medical centres and much more.

The introduction of the R32 Hybrid Product Range provides the obvious answer for those customers looking for a future-proof heating and cooling solution that delivers advanced efficiency with improved corporate social responsibility and minimises environmental impact.



R32 – The Greener Solution

The Shift Away from R410A Refrigerant to Low GWP Alternatives like R32

The global community is in a race to lower its carbon footprint and decrease the rate of global warming before it is too late.

The Kigali Amendment to the Montreal Protocol ratified on the 3rd of October 2019, dictates the rate of phase down of HFC refrigerants for New Zealand as part of this strategy and commenced on the 1st of January 2020.


It is estimated that this directive has the potential to avoid aggregate emissions of more than 90 gigatonnes of CO₂e by 2050 – equivalent to two years of total global greenhouse gas emissions (US EPA 2016)!

The key to achieving this goal is the shift away from traditional refrigerants such as R410A.

Replacing traditional refrigerants to those with a much lower GWP, will be a big step towards significantly reducing the future potential rate of rise in the earth's temperature and the catastrophic effects that would have on our planet.

The new R32 Hybrid Air Source Range combines all the benefits of the current R410A range with 33% of the Global Warming Potential. That's the lowest GWP in the VRF market!

Regulated Phase Down of CO₂ Emissions

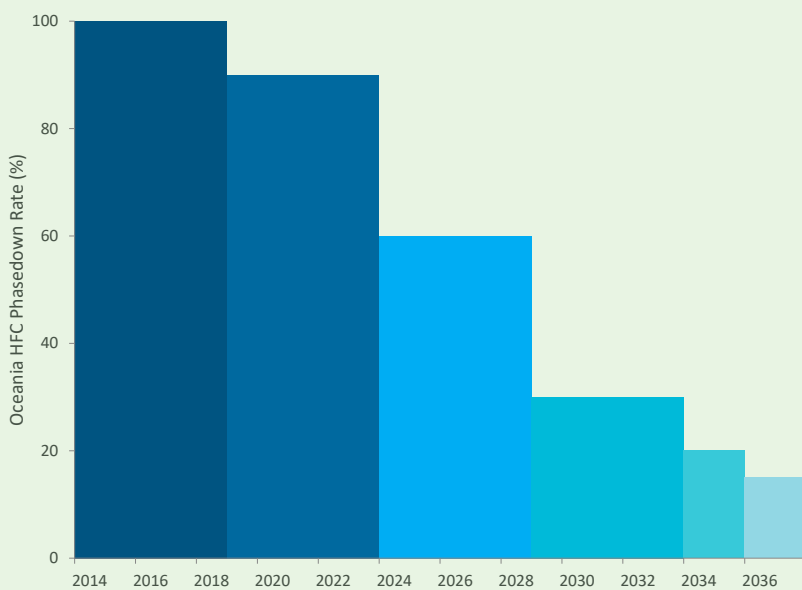

GWP is a measure of the warming potential as compared to CO₂ which has a unitary GWP of 1.

R32 refrigerant is zero ozone depleting and has a GWP 66% less than R410A. For example, R410A will hold 2,088 times more heat when released in the upper atmosphere than the equivalent amount of CO₂ would.


R32 refrigerant is being adopted by Mitsubishi Electric as an important step in the process towards the ultimate goal of a zero ODP, lower GWP, efficient, safe, and non-toxic refrigerant.

ETS – Emissions Trading Scheme

In New Zealand specifically, the ETS has put a price on greenhouse gas emissions and provides an incentive to reduce emissions and promote strategies to absorb carbon dioxide. This is known as the SGG (Synthetic Greenhouse Gas) Levy.

Due to the increasing cost of refrigerant associated with the ETS Synthetic Greenhouse Gas Levy (NZ), building capital and maintenance costs will continue to climb using traditional heating and cooling systems that utilise higher GWP refrigerants such as R410A.

The Hybrid system uses R32 refrigerant and requires less of it overall, reducing costs.

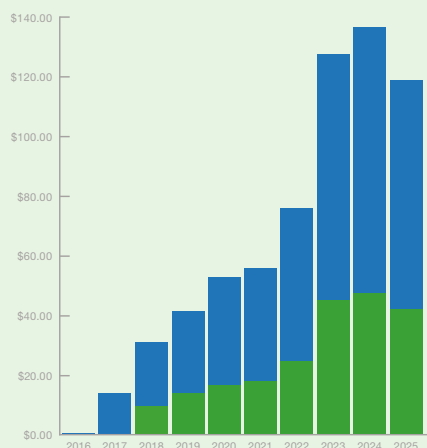

Year	Levy Rate – per kg Refrigerant (R410A)	Levy Rate – per kg Refrigerant (R32)
2016	\$0.31 Actual	
2017	\$13.72 Actual	
2018	\$30.78 Actual	\$9.94 Actual
2019	\$41.55 Actual	\$13.42 Actual
2020	\$51.29 Actual	\$16.56 Actual
2021	\$53.50 Actual	\$17.28 Actual
2022	\$76.29 Actual	\$24.64 Actual
2023	\$129.85 Actual	\$45.79 Actual
2024	\$138.18 Actual	\$48.72 Actual
2025	\$119.65 Actual	\$42.19 Actual

What is R32 Hybrid?

Next Generation 2-Pipe Water Based VRF Technology

R32 Hybrid is a unique 2-Pipe Heat Recovery VRF System that replaces refrigerant with water between the Hybrid Branch Circuit Controller and the indoor units.

This revolutionary design minimises the need for expensive and on-going leak detection servicing and is specifically designed for occupied spaces where quiet, energy efficient, simultaneous heating and cooling is valued.

R32 Hybrid is quick, easy and flexible to design and install using the same control and network as traditional VRF systems. Furthermore, the decentralised system means phased installation is possible with similar high levels of seasonal efficiency expected with VRF.

With water at the indoor units, R32 Hybrid provides comfortable, stable air temperature control with no refrigerant

in occupied spaces, minimising the need for leak detection to comply with AS/NZS 5149. (1-4) 2016.

R32 Hybrid is a truly integrated modern heating and cooling solution for office buildings, hotels, hospitals, medical centres, schools, high-rise buildings, shopping centres and other commercial premises, where occupant comfort is paramount.

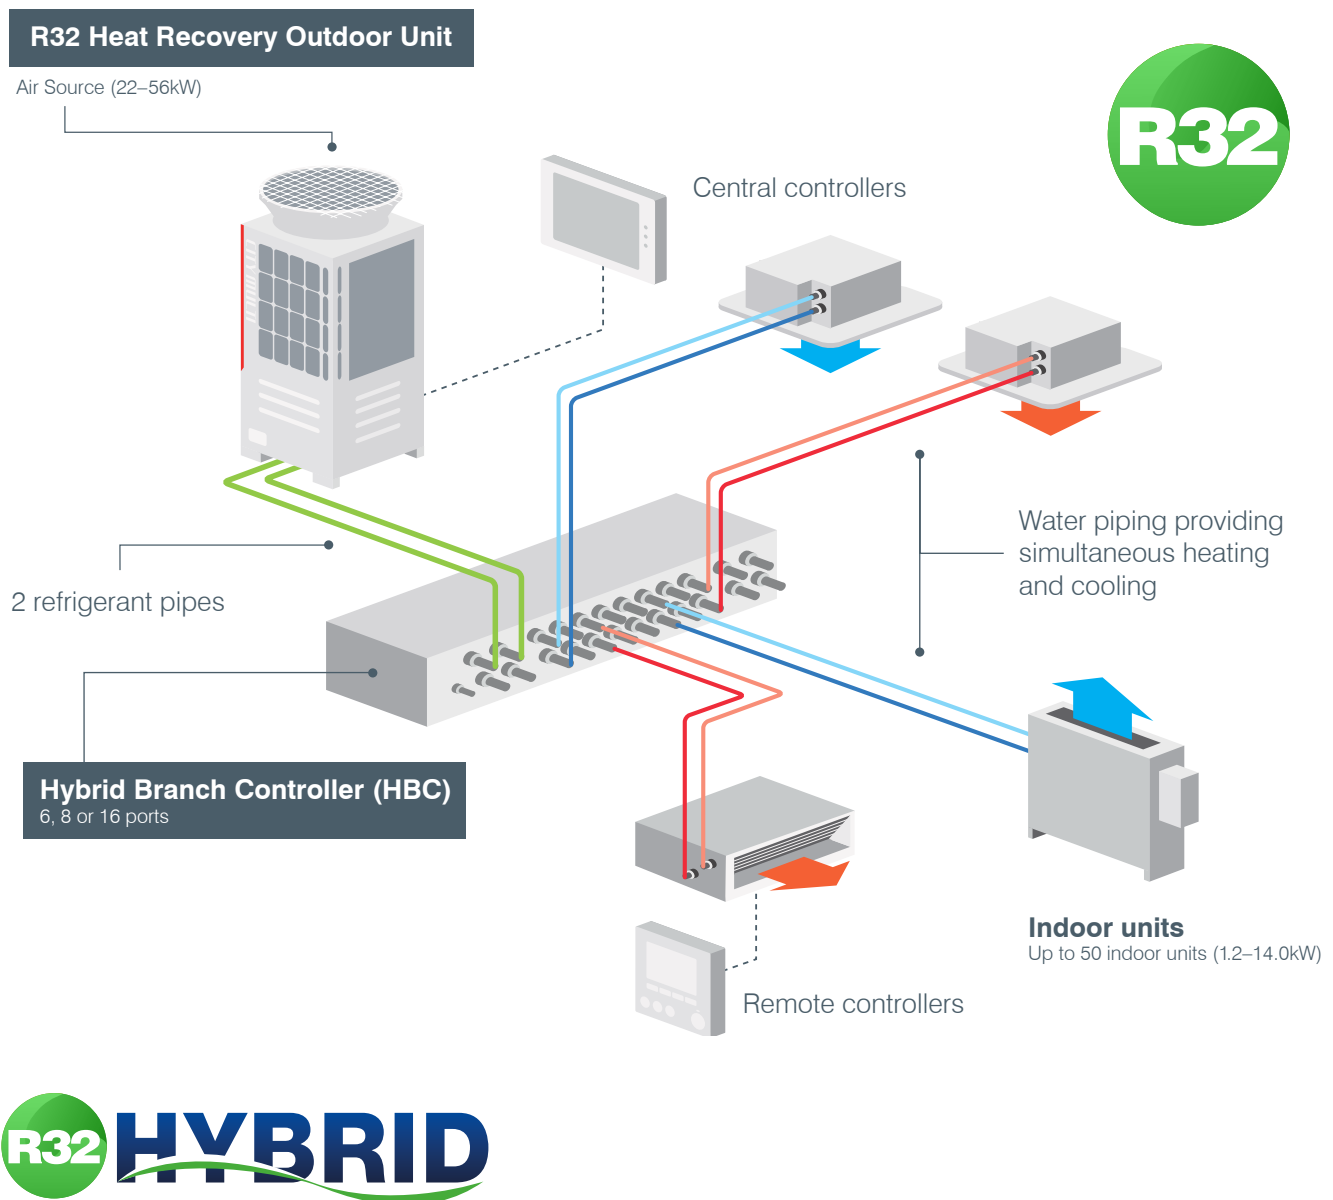


Image for representation only.

Where Can R32 Hybrid be Applied?



R32 Hybrid is the Complete Solution for Today's Modern Buildings

City Multi R32 Hybrid Systems allow for a flexible layout, making installation simple. With the use of centralised control, R32 Hybrid can be utilised in a wide variety of applications that require individual space comfort settings such as hotels, offices, hospitals, nursing homes and schools.

Furthermore, R32 Hybrid minimises the potential hazards to people, property and the environment that could result from leakages of traditional refrigerant systems in confined occupied spaces.



Mixed-Use Buildings

As we look for ways to balance population growth in crowded city centres, more mixed-use properties are being developed; often combining retail, office, leisure and living spaces in the same building. R32 Hybrid provides a fully adaptable solution benefiting from air or water source options, using an extensive range of controls to ensure optimum performance.

Offices

Modern offices and commercial buildings need air conditioning systems that provide the highest levels of comfort, freshness and energy efficiency.



Hotels

Customer comfort is paramount with legislation focusing attention on energy use and seeking to limit the use of refrigerant in occupied spaces. R32 Hybrid removes the need for leak detection in the occupied space, thereby reducing the total cost of the system and ongoing maintenance of the leak detection system itself.

Hospitals and Medical Centres

With regards to patient health and safety, this system has no refrigerant in the Water-Based Hybrid Indoor Units and can deliver mild off-coil temperatures. R32 Hybrid minimises the need for leak detectors in consulting rooms and provides a solution to critical refrigerant limits outlined in AS/NZS 5149. (1-4) 2016.

Education

Providing comfort through temperature stability, removal of refrigerant from the occupied space and reduced noise – R32 Hybrid provides a truly integrated solution. R32 Hybrid delivers comfortable and stable air temperature control with no refrigerant in occupied spaces, minimising the need for leak detection.





The R32 Hybrid Advantage

VRF Performance with Hydronic Levels of Comfort

Building owners, facility managers and the construction industry have been looking for HVAC systems that deliver high operational efficiency whilst minimising the Global Warming Potential of the refrigerants used within these systems.

Mitsubishi Electric's R32 Hybrid Systems provide a commercially viable alternative solution to traditional R410A systems and addresses one of the most pressing challenges in the New Zealand air conditioning industry on how to tackle high charge volumes and lower GWP refrigerants in large systems. It offers customers a future-proof solution that delivers advanced cost efficiencies with improved corporate social responsibility.

Water is at the Heart of the Indoor Units

Water, rather than traditional refrigerant, is at the heart of the indoor units. This means there is no risk of refrigerant leaking into small confined occupied spaces. R32 Hybrid minimises the need for leak detection, reducing the total cost of the system and on-going maintenance of the leak detection system itself.


Minimise the Need for Leak Detection Systems

In commercial buildings, additional leak detection systems specific to air conditioning are often installed to safeguard occupants due to increasing safety regulations. This affects hotels in particular, where air conditioners are installed in the room space and occupant safety is critical.

A leak detection system is designed to trigger an alarm if refrigerant was to leak into the room and initiate an evacuation of the space to try and prevent harm to the occupants. These systems can be expensive and add to the cost of design, build and maintenance.

Realise Significant Maintenance Cost Reductions

Throughout a system's lifetime, annual testing and the recalibration of leak detection sensors adds significant cost to a VRF system. Using R32 Hybrid instead, removes this need and could provide as much as 30% in maintenance savings over 15 years.

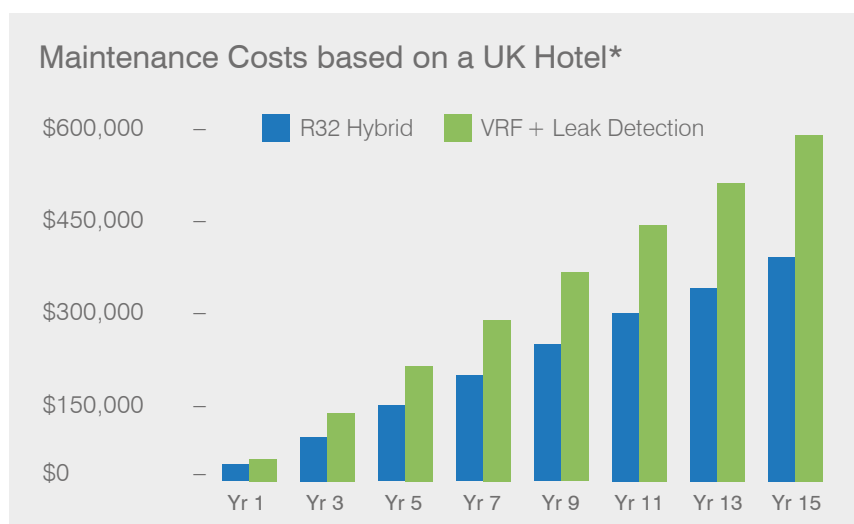

* Based on a real project using costs from a Mitsubishi Electric Business Solutions Partner in the United Kingdom.



R32 Hybrid Key Features and Benefits

► Provides Simultaneous Heating and Cooling with Full Heat Recovery

R32 Hybrid is an advanced simultaneous heating and cooling system with heat recovery and delivers a proven alternative solution to traditional R410A VRF or VRV systems.

► Energy Saving

Save more energy through heat recovery operation if heating and cooling operations are required at the same time.

The more frequently heating and cooling simultaneous operation occurs, the higher the energy saving effect becomes.

Even higher efficiency operation is possible by utilising the centralised control and scheduled operation.

► Use Less Material and Equipment

Mitsubishi Electric's unique 2-Pipe Heat Recovery System requires less piping than a 4-pipe chiller system.

The system does not require an external pump, valves, sensors, actuators, or other ancillary controls associated with conventional 4-pipe chiller systems.

► Flexible Design and Modularity Allow for a Manageable Phased Installation

The small footprint and modular design means building owners can now take advantage of a manageable phased installation.

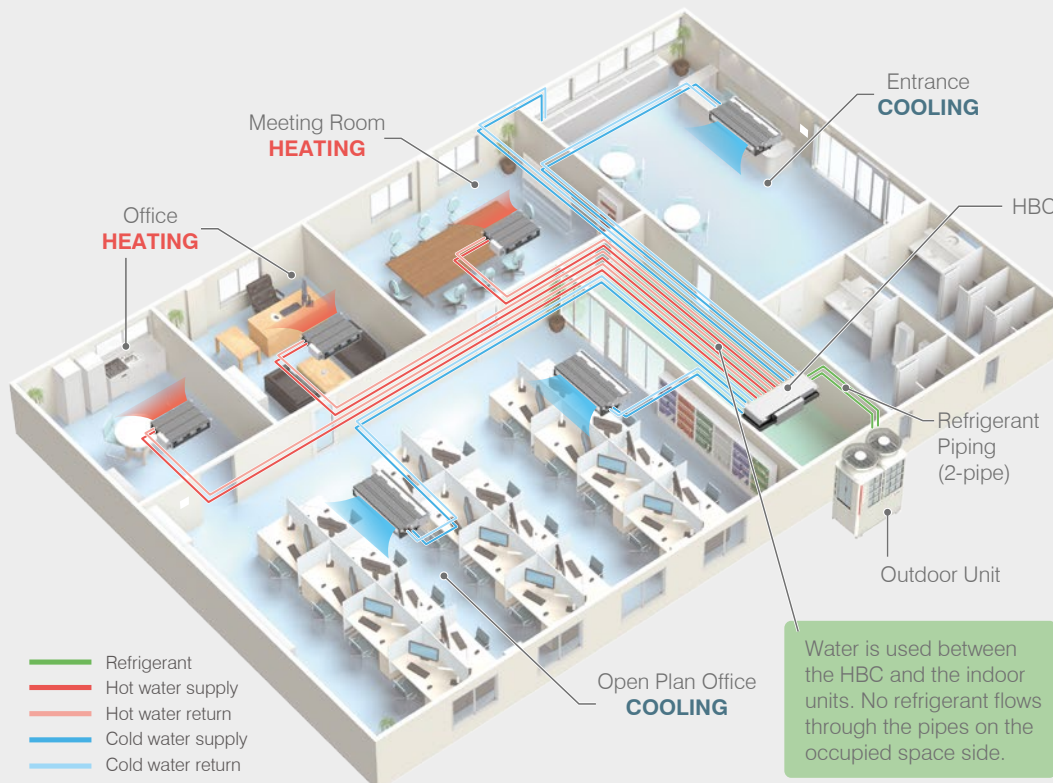


Image for representation only.

The HBC plant room may need leak detection based on AS/NZS 5149. (1-4) 2016.

► **Water Instead of Refrigerant is at the Heart of the Indoor Units**

R32 Hybrid is based on a 2-Pipe Heat Recovery VRF System but uses water as a heat exchange medium between the Hybrid Branch Controller and the indoor units.

As such, the system combines the comfort of a traditional hydronic system with the efficiency and ease of modern VRF air conditioning – giving you the best of both worlds.

► **Reduce Maintenance Costs and Maximise Safety by Minimising the Need for Leak Detection**

Legislation is now demanding that leak detection equipment is installed alongside VRF air conditioning when it is used in small occupied spaces in accordance with AS/NZS 5149. (1-4) 2016.

The R32 Hybrid architecture minimises the need for leak detection in these confined areas. This is because water instead of refrigerant is piped between the branch box and the indoor units mounted in each room. As a result there is no risk of refrigerant escaping into the room space.

In addition to maximising occupant safety, significant up front equipment and on-going maintenance cost savings are able to be realised because expensive leak detection systems are not required to be installed and maintained within occupied rooms.

► **Quieter Operation Through Water Based Fan Coils**

Because water instead of refrigerant is circulated through the terminal fan coils, quiet operation and silent off cycle operation is assured.

► **High Sensible Cooling and Stable Room Temperatures**

Occupant comfort is paramount. R32 Hybrid Systems deliver milder off coil temperatures and are specifically designed to provide a gradual rate of change of temperature within the air conditioned space, delivering a comfortable and stable environment.

Furthermore, R32 Hybrid offers on average a 10% increase in sensible cooling at terminal compared to traditional VRF systems.

► **Combat the Rising Costs of R410A Refrigerant**

The rapid and continuing price rises of R410A refrigerant is placing a strain on the viability of traditional VRF systems.

As a result Mitsubishi Electric have developed R32 Hybrid to ensure that both customers and installers not only have an alternative, but also get the added benefits of lower refrigerant costs, efficient performance and advanced controls.

► **R32 Minimal Global Warming Impact with 66% Less GWP Than R410A**

Existing VRF units use R410A which has a GWP of 2,088, the newly adopted R32 refrigerant has a reduced GWP of 675 – that's 66% less than R410A.



R32 Hybrid Case Study – Cuba Precinct



A large scale regeneration project in the heart of Wellington city uses an R32 Hybrid system operating with a significantly reduced quantity of refrigerant and only water circulating in work areas to ensure tenant comfort, safety and affordability.



► Project Overview

This major inner city regeneration project required an air conditioning system able to provide a safe, comfortable working environment with a small carbon footprint while reducing operational and maintenance costs.

Mitsubishi Electric's R32 Hybrid system more than satisfies these requirements – hence its logical selection as the preferred air conditioning system.

► The Solution

Situated in what is often termed 'the true heart of Wellington', Cuba Precinct is the result of a large regeneration project designed to embody the character of Cuba Street and its environs, while providing space for ground floor retail businesses with office and apartment accommodation above. It involved preserving and injecting life into several historic buildings as well as raising new structures above those buildings.

In the latter part of 2020, the Greater Wellington Regional Council moved into the second and third floors of the newly created open plan office space – one of Wellington's largest with an area of 6000 square metres.

Designed to have a low carbon footprint and exceed the current New Building Standard, the refurbishment of the historic buildings was completed with these guiding principles in mind. The Mitsubishi Electric R32 Hybrid Air Conditioning System was therefore the logical choice for the large open plan office space.


This was due to its superior safety features and occupier comfort levels, as well as lower operating and maintenance costs when compared to traditional systems using R410A refrigerant.

The Hybrid Branch Controller is the heart of the system, linking outdoor and indoor units and efficiently performing heat exchange between both.

The R32 Hybrid system delivers a world first with simultaneous heating and cooling. Heat is recovered and redistributed, negating the need for a separate heating system. It uses a unique 2-pipe configuration, i.e, a reduced number of pipes which also reduces the installation cost and time.

A significant safety feature is the use of water throughout the pipework in occupied spaces. This means that refrigerant (R32) is only used in the system between the outdoor condensers and the Hybrid Branch Controllers (HBCs) – well away from any occupied spaces. This removes the need for expensive leak detection equipment in occupied spaces – resulting in reduced maintenance costs as there is no requirement for annual leak detection checks.

Hybrid Branch Controllers are the heart of the system. They link outdoor units to indoor units and are responsible for heat exchange between refrigerant-controlled outdoor units and water-based indoor circuits to indoor units. Water is circulated to indoor units by energy efficient pumps.

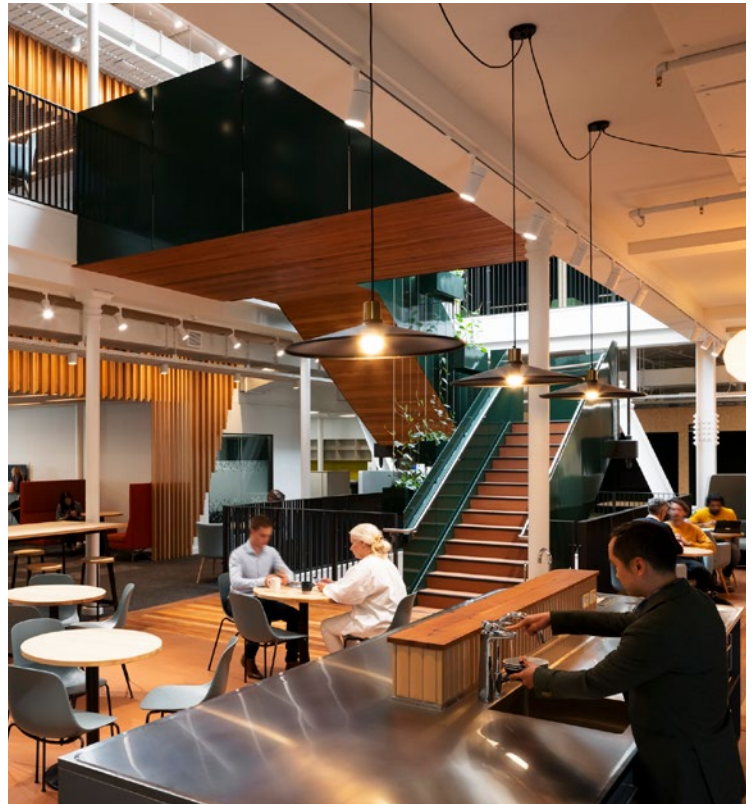

Jason Mann Photography

R32 Hybrid Case Study – Cuba Precinct

Plastic piping is used to transport water throughout occupied spaces instead of the traditional soldered copper piping used to transport refrigerant. This feature combined with the unique 2-pipe heat recovery system – rather than a conventional 4-pipe chiller system – means less piping is installed and none of the extra controls associated with a 4-pipe system are required - amounting to significant installation cost savings.

The modular design and small footprint of the R32 Hybrid System along with its flexible duct layout allows airflow patterns to be arranged to suit the application, letting building owners manage a phased installation – a plus when it comes to installation budgets and their inevitable variances.

Outdoor units all have simultaneous heating and cooling and heat recovery. Indoor units are concealed within the ceiling space making for unobtrusive air conditioning while preserving the aesthetic of the working space and overall appearance of the room. Quiet operation is another feature of these units.



Low noise levels (due to the use of water instead of refrigerant in the terminal fan coils among other noise-reducing features), more stable milder off-coil temperatures, the removal of draught potential from office spaces, faster defrosts, no critical refrigeration concerns and less risk to the environment and humans all contribute to a system that provides comfort with simplified maintenance and a significant cut in long-term energy costs.

Using the system's flexible master and individual remote controls enables efficient and economic management of airflows, heating and air conditioning levels throughout the building. As well as a master control, individual room units have remote controls of their own.

The cost of R410A refrigerant continues to rise rapidly as a deterrent to its use in air conditioning systems due to its high GWP (Global Warming Potential). Mitsubishi Electric's R32 Hybrid System leverages the low GWP of R32 refrigerant (about one third that of conventional R410A refrigerant), lower refrigerant costs, a small carbon footprint and reduced running costs to provide an efficient system with built-in future proofing able to provide high comfort levels while complying with environmental legislation.



Installation Summary

R32 Hybrid Systems

R32 Outdoor Units

- 1 x PURY-M250YNW-A1-BS
- 4 x PURY-M350YNW-A1-BS
- 2 x PURY-M450YNW-A1-BS
- 4 x PURY-M500YNW-A1-BS

Hybrid Branch Controllers

- 17 x CMB-WM108V-AA

Controls

- 1 x AE-200E Touch Screen Centralised Controller with BACnet Licence
- 1 x EW-50 Expansion Module
- 33 x PAR-U02MEDA-E Local Hardwired Controllers

Hybrid Indoor Units

- 2 x PEFY-WP32VMA-E Medium Static Ducted Units
- 1 x PEFY-WP40VMA-E Medium Static Ducted Unit
- 1 x PEFY-WP50VMA-E Medium Static Ducted Unit
- 1 x PEFY-WP63VMA-E Medium Static Ducted Unit
- 6 x PEFY-WP71VMA-E Medium Static Ducted Units
- 10 x PEFY-WP80VMA-E Medium Static Ducted Units
- 3 x PEFY-WP100VMA-E Medium Static Ducted Units
- 15 x PEFY-WP125VMA-E Medium Static Ducted Units
- 4 x PLFY-WP20VFM-E Compact Cassette Units
- 7 x PLFY-WP25VFM-E Compact Cassette Units
- 8 x PLFY-WP32VFM-E Compact Cassette Units
- 1 x PLFY-WP32VBM-E Standard Cassette Unit
- 2 x PLFY-WP40VBM-E Standard Cassette Units
- 2 x PKFY-WL20VLM-E High Wall Units
- 2 x PKFY-WL25VLM-E High Wall Units

Split Systems

Condensing Units

- 2 x PUZ-ZM100VKA-A
- 1 x MUZ-GL35VGD

High Wall Units

- 2 x PKA-M100KAL
- 1 x MSZ-GL35VGD

Hardwired Controllers

- 2 x PAR-33MAA

M-Net Interfaces

- 1 x PAC-SJ95MA-E M-Net Interface
- 1 x MAC-334IF M-Net Interface

Key Features

Safety, comfort, efficiency and reduced running costs feature heavily in the Mitsubishi Electric R32 Hybrid System.

Less piping and leak detection equipment significantly reduces installation costs.

Quiet operation and the reduction of operational draught from office spaces provides excellent comfort levels in occupied areas.

R32 refrigerant has a significantly lower GWP than R410A refrigerant and is also much cheaper making it the logical choice when selecting an air conditioning system.



R32 Hybrid Technical System Overview

R32 Hybrid is based on a 2-Pipe Heat Recovery VRF System but uses water as a heat exchange medium between the Hybrid Branch Controller (HBC) and the indoor units.

As such, the system combines the comfort of a traditional hydronic system with the efficiency and ease of modern VRF air conditioning – giving you the best of both worlds.

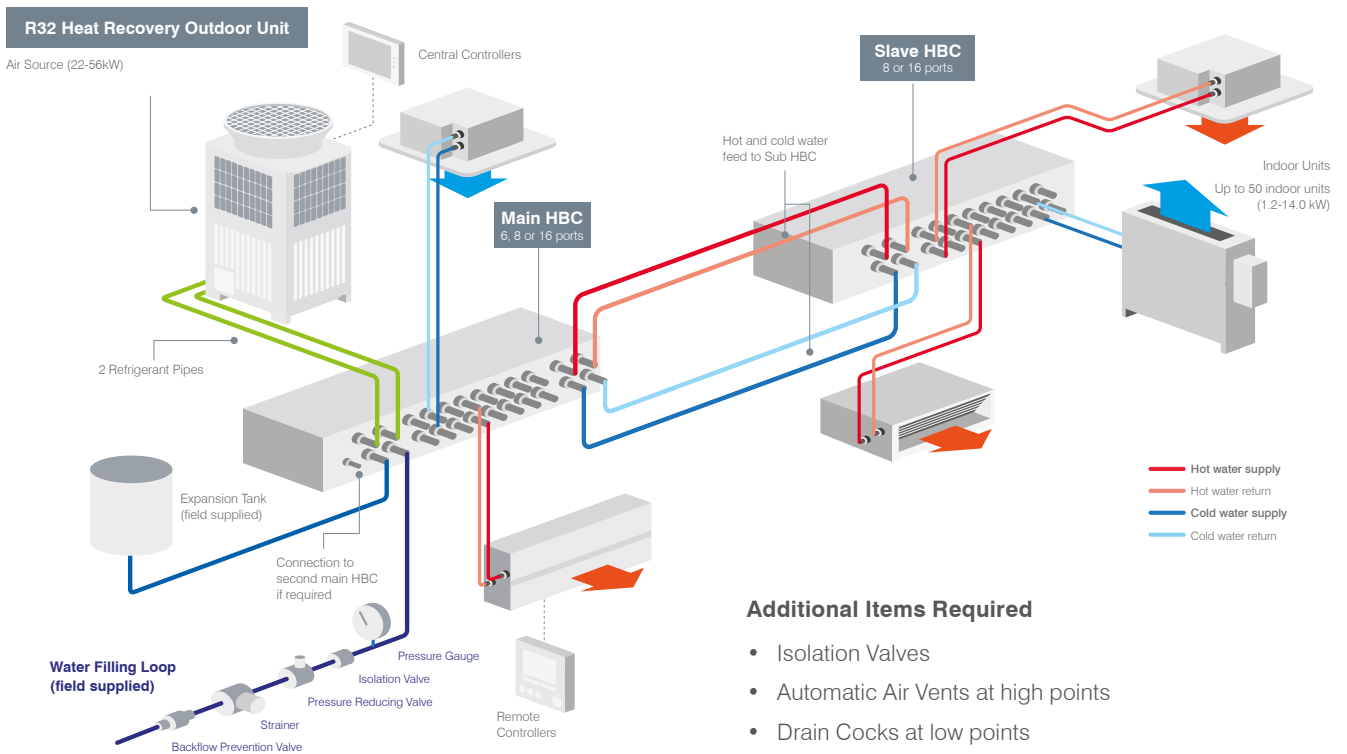


Image for representation only.

Model Lineup Vertical		Main HBC Only		Main HBC + Sub HBC				
Outdoor Unit Size	Main HBC Model	Total IDU Connection	Sub HBC Qty	Total IDU Connection	Sub HBC Qty	Total IDU Connection	Sub HBC Qty	Total IDU Connection
200	CMB-WM350F-AA	100-170 ^{*1}	1	100-300	2	100-300	3	100-300
250	CMB-WM350F-AA	125-170 ^{*1}	1	125-375	2	125-375	3	125-375
300	CMB-WM350F-AA	150-170 ^{*1}	1	150-420 ^{*1}	2	150-450	3	150-450
350	CMB-WM350F-AA	N/A ^{*1}	1	175-420 ^{*1}	2	175-525	3	175-525
400	CMB-WM500F-AA	N/A ^{*1}	1	200-420 ^{*1}	2	200-600	3	200-600
450	CMB-WM500F-AA	N/A ^{*1}	1	225-420 ^{*1}	2	225-670 ^{*1}	3	225-675
500	CMB-WM500F-AA	N/A ^{*1}	1	250-420 ^{*1}	2	250-670 ^{*1}	3	250-750

*1 Limited by HBC.

Model Lineup Horizontal		Main HBC Only		Main HBC + Sub HBC		
Outdoor Unit Size	Main HBC Qty	Total IDU Connection	Sub HBC Qty	Total IDU Connection	Sub HBC Qty	Total IDU Connection
200	1	100-300	1	100-300	2	N/A
250	1	125-375	1	125-375	2	N/A
300	1-2	150-450	1	150-450	2 ^{*2}	150-450
350	1-2	175-525	1	175-525	2 ^{*2}	175-525
400	2	200-600	1	200-600	2	200-600
450	2	225-675	1	225-675	2	225-675
500	2	250-750	1	250-750	2	250-750

*2 2x sub HBC only available if there are 2x Main HBC.


R32 Air Source Outdoor Unit



Utilising the City Multi PURY-EM-YNW High COP Outdoor Unit Range increases seasonal efficiency of the system. It benefits from heat recovery and an energy efficient inverter-driven compressor, providing simultaneous heating and cooling. The ultimate in heat exchange efficiency with aluminium flat tube heat exchanger technology!




Inverter Compressor

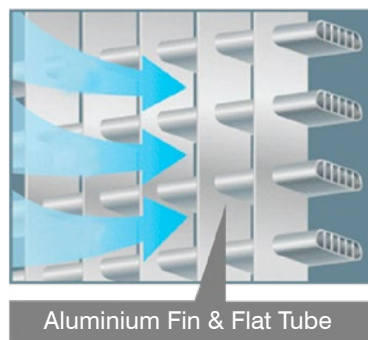

Available on EM High COP Models Only

Size	200	250	300	350	400	450	500
Cooling (kW)	22.4	28.0	33.5	40.0	45.0	50.0	56.0
Heating (kW)	25.0	31.5	37.5	45.0	50.0	56.0	63.0

Piping Length

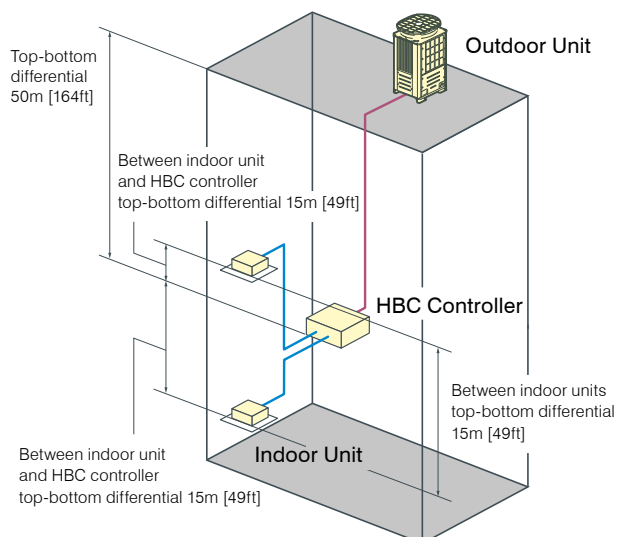

R Refrigerant Pipe **W** Water Pipe

Refrigerant Piping Lengths

Refrigerant Piping Lengths	Maximum Meters [Feet]
R Distance between heat source and HBC	110 [360]
W Farthest indoor unit from HBC controller	60 [196]

Vertical Differentials Between Units

Vertical Differentials Between Units	Maximum Meters [Feet]
R Heat source/HBC controller	50 [164]
R HBC/heat source (heat source unit above HBC)	50 [164]
R HBC/heat source (heat source unit below HBC)	40 [131]
W Indoor/HBC controller	15 (10) [49 (32)]* ¹
W Indoor/indoor	15 (10) [49 (32)]* ¹
R HBC/HBC controller	15 (10) [49 (32)]* ¹

*1. Values in () are applied when indoor total capacity exceeds 130% of outdoor unit capacity.

Hybrid Branch Controller (HBC) Horizontal

A - Plate Heat Exchangers

This is the point where the refrigerant circuit transfers its energy to the sealed water system.

There are two sets of Plate Heat Exchangers, both placed at opposite ends in the HBC.

Both sets provide hot water in heating mode or cold water in cooling mode.

During mixed mode, one set provides hot water while the other provides cold water to its respective flow header.

B - Pumps

Each set of Plate Heat Exchangers has a Water Pump.

This circulates the closed loop water system between the HBC and indoor units.

The discharge flow rate from the pump is controlled by the Valve Block.


C - Valve Block

A Valve Block is connected between each flow and return port of the HBC.


This Valve Block has two features;

Firstly, it has the choice of selecting between the two flow headers.

Secondly, it controls the flow of the water sent to the indoor unit, defining the capacity.

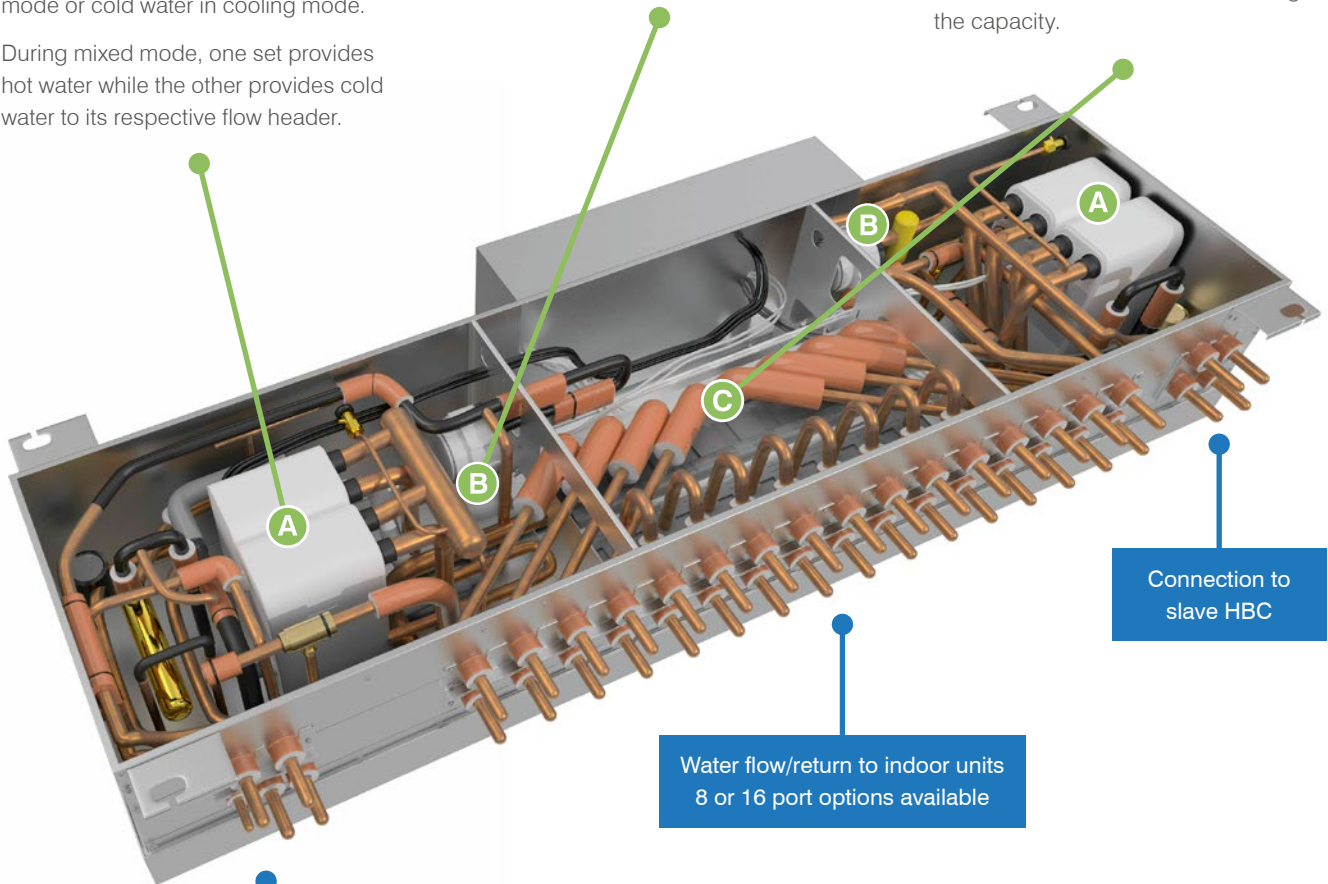



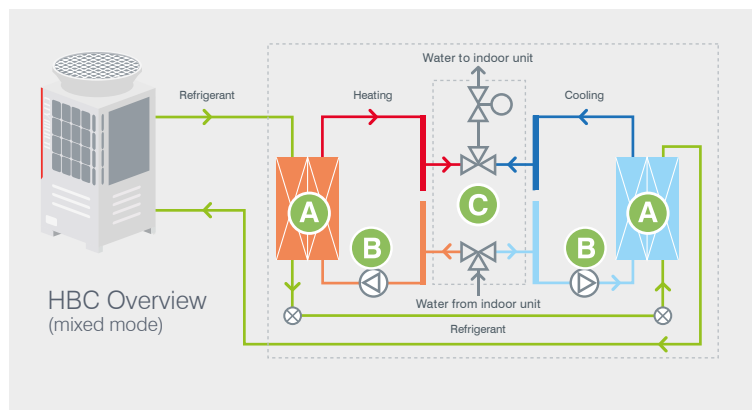



Refrigerant pipes to outdoor unit, expansion tank (field supplied) and water filling loop (field supplied), and balancing line to 2nd main HBC.













Hybrid Branch Controller (HBC)

The HBC is used for the connection of the outdoor unit and the indoor units. The heat exchange for refrigerant and water is performed simultaneously using the industry's first and patented R32 Hybrid Technology.

Type	Main Horizontal HBC		Main Vertical HBC		Sub Horizontal HBC	
Model	 CMB-WM108V-AA	 CMB-WM1016V-AA	 CMB-WM350F-AA	 CMB-WM500F-AA	 CMB-WM108V-BB	 CMB-WM1016V-BB
Number of Branches	8	16	6	6	8	16

Indoor Models

The following indoor units are exclusively for use with Hybrid City Multi.

Type	Name	Model	10	15	20	25	32	40	50	63	71	80	100	125
Ceiling Concealed Low Static Pressure	PEFY-WP VMS1-E		●	●	●	●	●	●	●					
Ceiling Concealed Medium Static Pressure	PEFY-WP VMA-E				●	●	●	●	●	●	●	●	●	●
Ceiling Concealed High Static Pressure	PEFY-WL VMHS-A							●	●	●	●	●	●	●
4-Way Airflow Cassette	PLFY-WL VEM-E				●	●	●	●	●	●		●	●	●
Compact Cassette	PLFY-WL VFM-E		●	●	●	●	●	●						
Wall Mounted	PKFY-WL VLM-E		●	●	●	●	●	●						
	PKFY-WL VKM-E								●	●		●		
Floor Standing Exposed	PFFY-WL VEM-A				●	●	●	●	●					
Under Ceiling	PCFY-WL VKM-E							●		●		●	●	
Floor Standing Concealed	PFFY-WL VCM-A				●	●	●	●	●					

Controller Range

Remote Controllers



Standard Controller PAR-41MAA

- Dual set point option
- Energy saving
- Backlit LCD screen
- Error information
- Operation lock
- Weekly schedule
- Temperature range setting



Advanced M-NET Controller PAR-U02MEDA

- Dual set point option
- Occupancy sensor
- Brightness sensor
- Energy saving
- Touch panel and backlit LCD screen
- LED indicator
- Temperature and humidity sensor
- Weekly schedule
- Error information



Simplified Controller PAC-YT52CRA

- ON/OFF
- Temperature control
- Fan speed
- Mode

Centralised Controllers and BMS Interface



AE-200E

- 10.4 inch LCD touchscreen display
- Web access – central control available via web browser
- 365-day time scheduler
- Energy consumption monitoring
- Programmable floor plan
- BACnet BMS Interface compatible



AT-50B

- Stand-alone centralised control
- Backlit LCD touchscreen
- Weekly and daily schedule



MelcoBEMS Mini BMS Interface

- MODBUS
- BACnet MS/TP



BAC-HD150 BMS Interface

- BACnet
- Connects directly to M-NET

MA Touch Remote

PAR-CT01MAA-SB

PAR-CT01MAA-PB



3.5" Touch Panel

Featuring a 3.5" HVGA Full Colour LCD Touchscreen.

Bluetooth Functionality

The controller can communicate with a smart phone or tablet device via Bluetooth. Operation and Setting App is available on the App Store.

Hotel Setting

A simple operation panel is available to display only ON/OFF, set temperature and fan speed – ideal for hotels.

Logo Customisation

Your company logo or image can be displayed on the screen.

Customisable Colour Options

180 different colour patterns can be selected for control parameters or background. Available in White and Premium Black.

CITY MULTI



Patented R32 Hybrid Technology

“True flexibility is achieved as the system is modular for a manageable phased installation.”



R32 **HYBRID**

Outdoor Unit – Air Source



Model			PURY-M200YNW-A1 (-BS)	PURY-M250YNW-A1 (-BS)
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	3-phase 4-wire 380-400-415 V 50/60 Hz
Cooling capacity (Nominal)	*1	kW	22.4	28.0
		BTU / h	76,400	95,500
		Power input kW	5.53	8.40
		Current input A	9.3-8.8-8.5	14.1-13.4-12.9
		EER	4.05	3.33
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)
	*3 Outdoor	D.B.	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)
Heating capacity (Nominal)	*2	kW	25.0	31.5
		BTU / h	85,300	107,500
		Power input kW	6.39	9.15
		Current input A	10.7-10.2-9.8	15.4-14.6-14.1
		COP	3.91	3.44
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)
	*3 Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	-20.0~15.5°C (-4~60°F)
Indoor unit connectable	Total capacity		50~150% of outdoor unit capacity	50~150% of outdoor unit capacity
	Model / Quantity		W/WP/WL10~125/1~30 *4	W/WP/WL10~125/1~37 *4
Sound pressure level (measured in anechoic room)		*5 dB <A>	59.0/59.0	60.5/61.0
Sound power level (measured in anechoic room)		*5 dB <A>	76.0/78.0	78.5/80.0
Refrigerant piping diameter	High pressure	mm (in.)	15.88 (5/8) Brazed	15.88 (5/8) Brazed
	Low pressure	mm (in.)	19.05 (3/4) Brazed	22.2 (7/8) Brazed
FAN	Type x Quantity		Propeller fan x 1	Propeller fan x 1
	Air flow rate	m ³ /min	170	185
		L/s	2,833	3,083
		cfm	6,003	6,532
	Control, Driving mechanism		Inverter-control, Direct-driven by motor	Inverter-control, Direct-driven by motor
Motor output	kW	0.92 x 1	0.92 x 1	
Compressor	*6 External static press.		0 Pa (0 mmH ₂ O)	0 Pa (0 mmH ₂ O)
	Type		Inverter scroll hermetic compressor	Inverter scroll hermetic compressor
	Starting method		Inverter	Inverter
	Motor output	kW	4.6	7.0
Case heater		kW	- (- V)	- (- V)
External finish			Pre-coated galvanized steel sheets (+ powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	Pre-coated galvanized steel sheets (+ powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>
External dimension HxWxD		mm	1,858 (1,798 without legs) x 920 x 740	1,858 (1,798 without legs) x 920 x 740
		in.	73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16	73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP,FAN)		Over-heat protection, Over-current protection	Over-heat protection, Over-current protection
	Compressor		-	-
	Fan motor		-	-
Refrigerant	Type x original charge		R32 x 5.2 kg (12 lbs)	R32 x 5.2 kg (12 lbs)
Net weight	kg (lbs)		227 (501)	227 (501)
Heat exchanger			Salt-resistant cross fin & copper tube	Salt-resistant cross fin & copper tube
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)	Auto-defrost mode (Reversed refrigerant cycle, Hot gas)
Optional parts			Main HBC: CMB-WM108,1016V-AA, CMB-WM350F-AA Sub HBC: CMB-WM108,1016V-BB	Main HBC: CMB-WM108,1016V-AA, CMB-WM350F-AA Sub HBC: CMB-WM108,1016V-BB

Notes :

- Nominal cooling conditions (subject to JIS B8615-2).
Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions (subject to JIS B8615-2).
Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- 5°C D.B. (23°F D.B.)/-6°C W.B. (21°F W.B.) to 21°C D.B. (70°F D.B.)/15.5°C W.B. (60°F W.B.) with cooling/heating mixed operation.
- There are restrictions on compatible combinations among W-model, WP-model, and WL-model indoor units. Refer to DATA BOOK for detailed information.
- Cooling mode/Heating mode.

- External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH₂O, 6.1 mmH₂O, 8.2 mmH₂O).
- Consult your dealer about the specification when setting external static pressure option.
- R32 is flammable, and certain restrictions apply to the installation of units.
- When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed.
- For detail, refer to the section in the DATA BOOK on installation restrictions.
- Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.
- Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU / h	= kW x 3.412
cfm	= m ³ / min x 35.31
lbs	= kg / 0.4536

^ Above specification data is subject to rounding variation.

Outdoor Unit – Air Source



Model			PURY-M300YNW-A1 (-BS)		PURY-M350YNW-A1 (-BS)	
Number of HBC			Single HBC (Horizontal type)	Double HBC (Horizontal type)/Single HBC (Vertical type)	Single HBC (Horizontal type)	Double HBC (Horizontal type)/Single HBC (Vertical type)
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz		3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)			33.5		40.0	
			114,300		136,500	
Power input			11.65		14.93	
Current input			19.6-18.6-18.0		25.2-23.9-23.0	
EER			2.87		2.67	
Temp. range of cooling			15.0~24.0°C (59~75°F)		15.0~24.0°C (59~75°F)	
Heating capacity (Nominal)			37.5		45.0	
			128,000		153,500	
Power input			11.00		13.14	
Current input			18.5-17.6-17.0		22.1-21.0-20.3	
COP			3.40		3.42	
Temp. range of heating			15.0~27.0°C (59~81°F)		15.0~27.0°C (59~81°F)	
Indoor unit connectable			50~150% of outdoor unit capacity		50~150% of outdoor unit capacity	
Sound pressure level (measured in anechoic room)			61.0/67.0		62.5/64.0	
Sound power level (measured in anechoic room)			80.0/86.5		81.0/83.0	
Refrigerant piping diameter			15.88 (5/8) Brazed		15.88 (5/8) Brazed	
FAN			22.2 (7/8) Brazed		28.58 (1-1/8) Brazed	
Type x Quantity			Propeller fan x 1		Propeller fan x 2	
Air flow rate			240		250	
			4,000		4,167	
			8,474		8,828	
Control, Driving mechanism			Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor	
Motor output			0.92 x 1		0.46 x 2	
External static press.			0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)	
Compressor			Inverter scroll hermetic compressor		Inverter scroll hermetic compressor	
Starting method			Inverter		Inverter	
Motor output			8.0		9.6	
Case heater			- (- V)		- (- V)	
External finish			Pre-coated galvanized steel sheets (+ powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+ powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension HxWxD			1,858 (1,798 without legs) x 920 x 740		1,858 (1,798 without legs) x 1,240 x 740	
			73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16		73-3/16 (70-13/16 without legs) x 48-7/8 x 29-3/16	
Protection devices			High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
Inverter circuit (COMP./FAN)			Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
Compressor			-		-	
Fan motor			-		-	
Refrigerant			R32 x 5.2 kg (12 lbs)		R32 x 8.0 kg (18 lbs)	
Net weight			227 (501)		270 (596)	
Heat exchanger			Salt-resistant cross fin & copper tube		Salt-resistant cross fin & copper tube	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		Auto-defrost mode (Reversed refrigerant cycle)	
Optional parts			Main HBC: CMB-WM108,1016V-AA, CMB-WM350F-AA Sub HBC: CMB-WM108,1016V-BB		Main HBC: CMB-WM108,1016V-AA, CMB-WM350F-AA Sub HBC: CMB-WM108,1016V-BB	

Notes :

- Nominal cooling conditions (subject to JIS B8615-2).
Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions (subject to JIS B8615-2).
Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- 5°C D.B. (23°F D.B.)/-6°C W.B. (21°F W.B.) to 21°C D.B. (70°F D.B.)/15.5°C W.B. (60°F W.B.) with cooling/heating mixed operation.
- There are restrictions on compatible combinations among W-model, WP-model, and WL-model indoor units. Refer to DATA BOOK for detailed information.
- Cooling mode/Heating mode.

- External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH₂O, 6.1 mmH₂O, 8.2 mmH₂O).
- Consult your dealer about the specification when setting external static pressure option.
- R32 is flammable, and certain restrictions apply to the installation of units.
- When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed.
- For detail, refer to the section in the DATA BOOK on installation restrictions.
- Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.
- Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU / h	=	kW x 3.412
cfm	=	m ³ / min x 35.31
lbs	=	kg / 0.4536

^ Above specification data is subject to rounding variation.

Outdoor Unit – Air Source



Model			PURY-M400YNW-A1 (-BS)	PURY-M450YNW-A1 (-BS)	PURY-M500YNW-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	3-phase 4-wire 380-400-415 V 50/60 Hz	3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	45.0	50.0	56.0	
		BTU / h	153,500	170,600	191,100	
	Power input	kW	15.15	15.47	22.25	
		Current input	A	25.5-24.2-23.4	26.1-24.8-23.9	37.5-35.6-34.3
		EER	kW / kW	2.97	3.23	2.51
Temp. range of cooling	*3 Indoor	W.B.	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	
	*3 Outdoor	D.B.	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	50.0	56.0	63.0	
		BTU / h	170,600	191,100	215,000	
	Power input	kW	14.08	16.18	18.26	
		Current input	A	23.7-22.5-21.7	27.3-25.9-25.0	30.8-29.2-28.2
		COP	kW / kW	3.55	3.46	3.45
Temp. range of heating	*3 Indoor	D.B.	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	
	*3 Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	-20.0~15.5°C (-4~60°F)	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity		50~150% of outdoor unit capacity	50~150% of outdoor unit capacity	50~150% of outdoor unit capacity	
	Model / Quantity		W/WP/WL10~125/2~50 *4	W/WP/WL10~125/2~50 *4	W/WP/WL10~125/2~50 *4	
Sound pressure level (measured in anechoic room)		*5 dB <A>	65.0/69.0	65.5/70.0	63.5/64.5	
Sound power level (measured in anechoic room)		*5 dB <A>	83.0/88.0	83.0/89.0	82.0/84.0	
Refrigerant piping diameter	High pressure	mm (in.)	19.05 (3/4) Brazed	19.05 (3/4) Brazed	19.05 (3/4) Brazed	
	Low pressure	mm (in.)	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	
FAN	Type x Quantity		Propeller fan x 2	Propeller fan x 2	Propeller fan x 2	
	Air flow rate	m ³ /min	315	315	295	
		L/s	5,250	5,283	4,917	
		cfm	11,123	11,193	10,416	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor	Inverter-control, Direct-driven by motor	Inverter-control, Direct-driven by motor	
	Motor output	kW	0.46 x 2	0.46 x 2	0.92 x 2	
*6 External static press.		0 Pa (0 mmH ₂ O)	0 Pa (0 mmH ₂ O)	0 Pa (0 mmH ₂ O)		
Compressor	Type		Inverter scroll hermetic compressor	Inverter scroll hermetic compressor	Inverter scroll hermetic compressor	
	Starting method		Inverter	Inverter	Inverter	
	Motor output	kW	12.2	13.1	17.4	
	Case heater	kW	- (- V)	- (- V)	- (- V)	
External finish			Pre-coated galvanized steel sheets (+ powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>			
External dimension HxWxD	mm		1,858 (1,798 without legs) x 1,240 x 740	1,858 (1,798 without legs) x 1,750 x 740		
	in.		73-3/16 (70-13/16 without legs) x 48-7/8 x 29-3/16	73-3/16 (70-13/16 without legs) x 68-15/16 x 29-3/16		
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)			
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection			
	Compressor		-			
	Fan motor		-			
Refrigerant	Type x original charge		R32 x 8.0 kg (18 lbs)	R32 x 10.8 kg (24 lbs)	R32 x 10.8 kg (24 lbs)	
Net weight	kg (lbs)		273 (602)	293 (646)	337 (743)	
Heat exchanger			Salt-resistant cross fin & copper tube	Salt-resistant cross fin & copper tube	Salt-resistant cross fin & copper tube	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle)			
Optional parts			Main HBC: CMB-WM108,1016V-AA, CMB-WM500F-AA Sub HBC: CMB-WM108,1016V-BB			

Notes :

- Nominal cooling conditions (subject to JIS B8615-2).
Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions (subject to JIS B8615-2).
Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- 5°C D.B. (23°F D.B.)/-6°C W.B. (21°F W.B.) to 21°C D.B. (70°F D.B.)/15.5°C W.B. (60°F W.B.) with cooling/heating mixed operation.
- There are restrictions on compatible combinations among W-model, WP-model, and WL-model indoor units. Refer to DATA BOOK for detailed information.
- Cooling mode/Heating mode.

- External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH₂O, 6.1 mmH₂O, 8.2 mmH₂O).
- Consult your dealer about the specification when setting external static pressure option.
- R32 is flammable, and certain restrictions apply to the installation of units.
- When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed.
- For detail, refer to the section in the DATA BOOK on installation restrictions.
- Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.
- Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU / h	= kW x 3,412
cfm	= m ³ / min x 35.31
lbs	= kg / 0.4536

^ Above specification data is subject to rounding variation.

Outdoor Unit – Air Source



Model			PURY-EM200YNW-A1 (-BS)	PURY-EM250YNW-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	22.4	28.0	
		BTU / h	76,400	95,500	
	Power input	kW	5.13	7.69	
		Current input	A	8.6-8.2-7.9	12.9-12.3-11.8
		EER	kW / kW	4.36	3.64
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	
	*3 Outdoor	D.B.	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	25.0	31.5	
		BTU / h	85,300	107,500	
	Power input	kW	6.23	8.84	
		Current input	A	10.5-9.9-9.6	14.9-14.1-13.6
		COP	kW / kW	4.01	3.56
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	
	*3 Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity		50~150% of outdoor unit capacity	50~150% of outdoor unit capacity	
	Model / Quantity		W/WP/WL10~125/1~30 *4	W/WP/WL10~125/1~37 *4	
Sound pressure level (measured in anechoic room)		*5 dB <A>	59.0/59.0	60.5/61.0	
Sound power level (measured in anechoic room)		*5 dB <A>	76.0/78.0	78.5/80.0	
Refrigerant piping diameter	High pressure	mm (in.)	15.88 (5/8) Brazed	15.88 (5/8) Brazed	
	Low pressure	mm (in.)	19.05 (3/4) Brazed	22.2 (7/8) Brazed	
FAN	Type x Quantity		Propeller fan x 1	Propeller fan x 1	
	Air flow rate	m ³ /min	170	185	
		L/s	2,833	3,083	
		cfm	6,003	6,532	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor	Inverter-control, Direct-driven by motor	
	Motor output	kW	0.92 x 1	0.92 x 1	
*6 External static press.			0 Pa (0 mmH ₂ O)	0 Pa (0 mmH ₂ O)	
Compressor	Type		Inverter scroll hermetic compressor	Inverter scroll hermetic compressor	
	Starting method		Inverter	Inverter	
	Motor output	kW	4.5	6.7	
	Case heater	kW	- (- V)	- (- V)	
External finish			Pre-coated galvanized steel sheets (+ powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	Pre-coated galvanized steel sheets (+ powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension HxWxD	mm		1,858 (1,798 without legs) x 920 x 740	1,858 (1,798 without legs) x 920 x 740	
	in.		73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16	73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection	Over-heat protection, Over-current protection	
	Compressor		-	-	
	Fan motor		-	-	
Refrigerant	Type x original charge		R32 x 5.2 kg (12 lbs)	R32 x 5.2 kg (12 lbs)	
Net weight	kg (lbs)		231 (510)	231 (510)	
Heat exchanger			Salt-resistant cross fin & aluminum tube	Salt-resistant cross fin & aluminum tube	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)	Auto-defrost mode (Reversed refrigerant cycle, Hot gas)	
Optional parts			Main HBC: CMB-WM108,1016V-AA, CMB-WM350F-AA Sub HBC: CMB-WM108,1016V-BB	Main HBC: CMB-WM108,1016V-AA, CMB-WM350F-AA Sub HBC: CMB-WM108,1016V-BB	

Notes :

- Nominal cooling conditions (subject to JIS B8615-2).
Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions (subject to JIS B8615-2).
Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- 5°C D.B. (23°F D.B.)/-6°C W.B. (21°F W.B.) to 21°C D.B. (70°F D.B.)/15.5°C W.B. (60°F W.B.) with cooling/heating mixed operation.
- There are restrictions on compatible combinations among W-model, WP-model, and WL-model indoor units. Refer to DATA BOOK for detailed information.
- Cooling mode/Heating mode.

- External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH₂O, 6.1 mmH₂O, 8.2 mmH₂O).
- Consult your dealer about the specification when setting external static pressure option.
- R32 is flammable, and certain restrictions apply to the installation of units.
- When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed.
- For detail, refer to the section in the DATA BOOK on installation restrictions.
- Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.
- Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU / h	=	kW x 3.412
cfm	=	m ³ / min x 35.31
lbs	=	kg / 0.4536

^ Above specification data is subject to rounding variation.

Outdoor Unit – Air Source



Model			PURY-EM300YNW-A1 (-BS)		PURY-EM350YNW-A1 (-BS)	
Number of HBC			Single HBC (Horizontal type)	Double HBC (Horizontal type)/Single HBC (Vertical type)	Single HBC (Horizontal type)	Double HBC (Horizontal type)/Single HBC (Vertical type)
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz		3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	33.5		40.0	
		BTU / h	114,300		136,500	
	Power input	kW	10.03	8.52	13.91	11.33
	Current input	A	16.9-16.0-15.5	14.3-13.6-13.1	23.4-22.3-21.5	19.1-18.1-17.5
EER	kW / kW		3.33	3.93	2.87	3.53
		Temp. range of cooling	Indoor	15.0~24.0°C (59~75°F)		15.0~24.0°C (59~75°F)
*3	Outdoor	D.B.	-5.0~52.0°C (23~126°F)		-5.0~52.0°C (23~126°F)	
	Heating capacity (Nominal)	*2	kW	37.5		45.0
BTU / h			128,000		153,500	
Power input	kW		10.46	9.93	13.10	12.16
		Current input	A	17.6-16.7-16.1	16.7-15.9-15.3	22.1-21.0-20.2
COP	kW / kW		3.58	3.77	3.43	3.70
		Temp. range of heating	Indoor	15.0~27.0°C (59~81°F)		15.0~27.0°C (59~81°F)
*3	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)		-20.0~15.5°C (-4~60°F)	
	Indoor unit connectable	Model / Quantity	Total capacity	50~150% of outdoor unit capacity		50~150% of outdoor unit capacity
Model / Quantity			W/WP/WL10~125/2~45 *4		W/WP/WL10~125/2~50 *4	
Sound pressure level (measured in anechoic room)	*5	dB <A>	61.0/67.0		62.5/64.0	
			Sound power level (measured in anechoic room)	*5	dB <A>	80.0/86.5
Refrigerant piping diameter	High pressure	mm (in.)				15.88 (5/8) Brazed
	Low pressure	mm (in.)	22.2 (7/8) Brazed		28.58 (1-1/8) Brazed	
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 2	
	Air flow rate	m ³ /min	240		250	
		L/s	4,000		4,167	
		cfm	8,474		8,828	
Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		
*6	Motor output	kW	0.92 x 1		0.46 x 2	
	External static press.		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)	
Compressor	Type		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor	
	Starting method		Inverter		Inverter	
	Motor output	kW	7.7		9.6	
	Case heater	kW	- (- V)		- (- V)	
External finish			Pre-coated galvanized steel sheets (+ powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+ powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension HxWxD			mm	1,858 (1,798 without legs) x 920 x 740	1,858 (1,798 without legs) x 1,240 x 740	
			in.	73-3/16 (70-13/16 without legs) x 36-1/4 x 29-3/16	73-3/16 (70-13/16 without legs) x 48-7/8 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP/FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
	Compressor					
	Fan motor					
Refrigerant	Type x original charge		R32 x 5.2 kg (12 lbs)		R32 x 8.0 kg (18 lbs)	
Net weight	kg (lbs)		231 (510)		276 (609)	
Heat exchanger			Salt-resistant cross fin & aluminum tube		Salt-resistant cross fin & aluminum tube	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		Auto-defrost mode (Reversed refrigerant cycle, Hot gas)	
Optional parts			Main HBC: CMB-WM108,1016V-AA, CMB-WM350F-AA Sub HBC: CMB-WM108,1016V-BB		Main HBC: CMB-WM108,1016V-AA, CMB-WM350F-AA Sub HBC: CMB-WM108,1016V-BB	

Notes :

- Nominal cooling conditions (subject to JIS B8615-2).
Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions (subject to JIS B8615-2).
Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- 5°C D.B. (23°F D.B.)/-6°C W.B. (21°F W.B.) to 21°C D.B. (70°F D.B.)/15.5°C W.B. (60°F W.B.) with cooling/heating mixed operation.
- There are restrictions on compatible combinations among W-model, WP-model, and WL-model indoor units. Refer to DATA BOOK for detailed information.
- Cooling mode/Heating mode.

- External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH₂O, 6.1 mmH₂O, 8.2 mmH₂O).
- Consult your dealer about the specification when setting external static pressure option.
- R32 is flammable, and certain restrictions apply to the installation of units.
- When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed.
- For detail, refer to the section in the DATA BOOK on installation restrictions.
- Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.
- Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU / h	= kW x 3.412
cfm	= m ³ / min x 35.31
lbs	= kg / 0.4536

^ Above specification data is subject to rounding variation.

Outdoor Unit – Air Source

HIGH COP



R32

Model			PURY-EM400YNW-A1 (-BS)	PURY-EM450YNW-A1 (-BS)	PURY-EM500YNW-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	3-phase 4-wire 380-400-415 V 50/60 Hz	3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	45.0	50.0	56.0	
		BTU / h	153,500	170,600	191,100	
	Power input	kW	13.84	15.24	18.06	
		Current input	A	23.3-22.1-21.3	25.7-24.4-23.5	30.4-28.9-27.9
		EER	kW / kW	3.25	3.28	3.10
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	
	*3 Outdoor	D.B.	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	50.0	56.0	63.0	
		BTU / h	170,600	191,100	215,000	
	Power input	kW	13.88	15.77	17.45	
		Current input	A	23.4-22.2-21.4	26.6-25.2-24.3	29.4-27.9-26.9
		COP	kW / kW	3.60	3.55	3.61
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	
	*3 Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	-20.0~15.5°C (-4~60°F)	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity		50~150% of outdoor unit capacity	50~150% of outdoor unit capacity	50~150% of outdoor unit capacity	
	Model / Quantity		W/WP/WL10~125/2~50 *4	W/WP/WL10~125/2~50 *4	W/WP/WL10~125/2~50 *4	
Sound pressure level (measured in anechoic room)	*5	dB <A>	65.0/69.0	65.5/70.0	63.5/64.5	
Sound power level (measured in anechoic room)	*5	dB <A>	83.0/88.0	83.0/89.0	82.0/84.0	
Refrigerant piping diameter	High pressure	mm (in.)	19.05 (3/4) Brazed	19.05 (3/4) Brazed	19.05 (3/4) Brazed	
	Low pressure	mm (in.)	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	
FAN	Type x Quantity		Propeller fan x 2	Propeller fan x 2	Propeller fan x 2	
	Air flow rate	m ³ /min	315	315	295	
		L/s	5,250	5,250	4,917	
		cfm	11,123	11,123	10,416	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor	Inverter-control, Direct-driven by motor	Inverter-control, Direct-driven by motor	
	Motor output	kW	0.46 x 2	0.46 x 2	0.92 x 2	
*6 External static press.		0 Pa (0 mmH ₂ O)	0 Pa (0 mmH ₂ O)	0 Pa (0 mmH ₂ O)		
Compressor	Type		Inverter scroll hermetic compressor	Inverter scroll hermetic compressor	Inverter scroll hermetic compressor	
	Starting method		Inverter	Inverter	Inverter	
	Motor output	kW	11.1	12.7	13.8	
	Case heater	kW	- (- V)	- (- V)	- (- V)	
External finish			Pre-coated galvanized steel sheets (+ powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>			
External dimension HxWxD	mm		1,858 (1,798 without legs) x 1,240 x 740	1,858 (1,798 without legs) x 1,240 x 740	1,858 (1,798 without legs) x 1,750 x 740	
	in.		73-3/16 (70-13/16 without legs) x 48-7/8 x 29-3/16	73-3/16 (70-13/16 without legs) x 48-7/8 x 29-3/16	73-3/16 (70-13/16 without legs) x 68-15/16 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)			
	Inverter circuit (COMP/FAN)		Over-heat protection, Over-current protection			
	Compressor		-	-	-	
	Fan motor		-	-	-	
	Fan motor		-	-	-	
Refrigerant	Type x original charge		R32 x 8.0 kg (18 lbs)	R32 x 10.8 kg (24 lbs)	R32 x 10.8 kg (24 lbs)	
Net weight	kg (lbs)		280 (618)	305 (673)	348 (768)	
Heat exchanger			Salt-resistant cross fin & aluminum tube	Salt-resistant cross fin & aluminum tube	Salt-resistant cross fin & aluminum tube	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle)			
Optional parts			Main HBC: CMB-WM108,1016V-AA, CMB-WM500F-AA Sub HBC: CMB-WM108,1016V-BB			

Notes :

- Nominal cooling conditions (subject to JIS B8615-2).
Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions (subject to JIS B8615-2).
Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.).
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- 5°C D.B. (23°F D.B.)/-6°C W.B. (21°F W.B.) to 21°C D.B. (70°F D.B.)/15.5°C W.B. (60°F W.B.) with cooling/heating mixed operation.
- There are restrictions on compatible combinations among W-model, WP-model, and WL-model indoor units. Refer to DATA BOOK for detailed information.
- Cooling mode/Heating mode.

- External static pressure option is available (30 Pa, 60 Pa, 80 Pa/3.1 mmH₂O, 6.1 mmH₂O, 8.2 mmH₂O).
- Consult your dealer about the specification when setting external static pressure option.
- R32 is flammable, and certain restrictions apply to the installation of units.
- When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed.
- For detail, refer to the section in the DATA BOOK on installation restrictions.
- Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.
- Due to continuing improvement, above specifications may be subject to change without notice.


Unit Converter

BTU / h = kW x 3.412
cfm = m³ / min x 35.31
lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.

HBC Controller

Horizontal Main-HBC

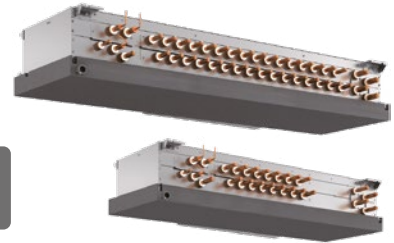

Model				CMB-WM108V-AA					CMB-WM1016V-AA				
Number of branch				8					16				
Power source				1-phase 220-230-240 V					1-phase 220-230-240 V				
				50 Hz		60 Hz			50 Hz		60 Hz		
Power input (220/230/240)	Cooling	kW		0.45/0.46/0.47		0.45/0.46/0.47			0.45/0.46/0.47		0.45/0.46/0.47		
	Heating	kW		0.45/0.46/0.47		0.45/0.46/0.47			0.45/0.46/0.47		0.45/0.46/0.47		
Current input (220/230/240)	Cooling	A		2.89/2.83/2.79		2.89/2.83/2.79			2.89/2.83/2.79		2.89/2.83/2.79		
	Heating	A		2.89/2.83/2.79		2.89/2.83/2.79			2.89/2.83/2.79		2.89/2.83/2.79		
Sound pressure level (measured in anechoic room)			dB <A>	41					41				
Applicable temperature range of installation site			°C (D.B.)	0~32					0~32				
External finish				Galvanised steel plate (Lower part drain pan: Pre-coated galvanised sheets + powder coating)					Galvanised steel plate (Lower part drain pan: Pre-coated galvanised sheets + powder coating)				
Connectable Outdoor/Heat source unit				PURY-P200~500YNW-A1(-BS)/ PURY-EP200~500YNW-A1(-BS) PURY-P200~500YLM-A1(-BS)/ PURY-EP200~500YLM-A1(-BS) PQRY-P200~500YLM-A1					PURY-P200~500YNW-A1(-BS)/ PURY-EP200~500YNW-A1(-BS) PURY-P200~500YLM-A1(-BS)/ PURY-EP200~500YLM-A1(-BS) PQRY-P200~500YLM-A1				
Indoor unit capacity connectable to 1 branch				Model W/WP/WL80 or smaller (Use optional joint pipe combining 2 branches when the total unit capacity exceeds W/WP/WL80.)					Model W/WP/WL80 or smaller (Use optional joint pipe combining 2 branches when the total unit capacity exceeds W/WP/WL80.)				
External dimension HxWxD			mm	300 x 1,520 x 630					300 x 1,800 x 630				
			in.	11-13/16 x 59-7/8 x 24-13/16					11-13/16 x 70-7/8 x 24-13/16				
Refrigerant piping diameter	To outdoor/heat source unit			Connectable outdoor/heat source unit capacity					Connectable outdoor/heat source unit capacity				
	High press. Pipe	mm (in.) O.D.	To P200	To P250/300	To P350	To P400	To P450/500	To P200	To P250/300	To P350	To P400	To P450/500	
			15.88 (5/8) Braze	19.05 (3/4) Braze	19.05 (3/4) Braze	15.88 (5/8) Braze	19.05 (3/4) Braze	15.88 (5/8) Braze	19.05 (3/4) Braze	19.05 (3/4) Braze	15.88 (5/8) Braze	19.05 (3/4) Braze	
	Low press. Pipe	mm (in.) O.D.	To P200	To P250/300	To P350	To P400	To P450/500	To P200	To P250/300	To P350	To P400	To P450/500	
19.05 (3/4) Braze			22.2 (7/8) Braze	28.58 (1-1/8) Braze	19.05 (3/4) Braze	22.2 (7/8) Braze	19.05 (3/4) Braze	22.2 (7/8) Braze	28.58 (1-1/8) Braze	19.05 (3/4) Braze	22.2 (7/8) Braze		
To Main HBC			15.88 (5/8) Braze					15.88 (5/8) Braze					
Water piping diameter (To Sub HBC)	Connection size		Inlet	mm O.D.					mm O.D.				
			Outlet	22					22				
	Field pipe size		Inlet	mm I.D.					mm I.D.				
			Outlet	20					20				
Water piping diameter (To Indoor Unit)	Connection size		Inlet	W/WP/WL10-50		W/WP/WL63-125			W/WP/WL10-50		W/WP/WL63-125		
			Outlet	22		22			22		22		
	Field pipe size		Inlet	20		30			20		30		
			Outlet	20		30			20		30		
Field drain pipe size			mm (in.)	O.D. 32 (1-1/4)					O.D. 32 (1-1/4)				
Net weight			kg (lbs)	86 (190) [96 (212) with water]					98 (217) [111 (245) with water]				
Standard attachment		Accessory	Drain Connection pipe (with flexible hose and insulation)					Drain Connection pipe (with flexible hose and insulation)					
Optional parts				-					-				

Notes :

1. Installation/foundation work, electrical connection work, duct work, insulation work, power source switch, and other items shall be referred to the Installation Manual.
2. This unit is for R32/R410A refrigerant.
3. Install this unit in a location where noise (refrigerant noise) emitted by the unit will not disturb the neighbors. (For use in quiet environments with low background noise, position the HBC at least 5 m away from any indoor units.)
4. Please install the HBC in a place where noise will not be an issue.
5. Please attach an expansion vessel (field supply).
6. Please use copper or plastic pipes for the water circuit. Do not use steel or stainless steel pipework. Furthermore, when using copper pipe-work use a non-oxidative brazing method. Oxidation of the pipe-work will reduce the pump life.
7. When brazing the pipes, be sure to braze, after covering a wet cloth to the insulation pipes of the units in order to prevent it from burning and shrinking by heat.
8. Please install an air purge valve where air will gather in the water circuit.
9. Please install a pressure reducing valve and a strainer on the water supply to the HBC.
10. Please refer to the DATA BOOK or the Installation Manual for the specified water quality.
11. This unit is not designed for outside installations.
12. Please always make water circulate or pull out the circulation water completely when not using it. *Please do not use it as a drinking water.
13. Please do not use ground water and well water.
14. When installing the HBC in an environment which may drop below 0 °C, please add antifreeze liquid to the circulating water. (Refer to the DATA BOOK and the Installation Manual).
15. R32 is flammable, and certain restrictions apply to the installation of units. When installing new units, moving the existing units, or changing the layout of the room, ensure that installation restrictions are observed. For detail, refer to the section in the DATA BOOK on installation restrictions.

HBC Controller

Horizontal Sub-HBC



Model			CMB-WM108V-BB			CMB-WM1016V-BB					
Number of branch			8			16					
Power source			1-phase 220-230-240 V			1-phase 220-230-240 V					
Power input (220/230/240)	Cooling	kW	0.01/0.01/0.01	0.01/0.01/0.01	0.01/0.01/0.01	0.01/0.01/0.01	0.01/0.01/0.01				
	Heating	kW	0.01/0.01/0.01	0.01/0.01/0.01	0.01/0.01/0.01	0.01/0.01/0.01	0.01/0.01/0.01				
Current input (220/230/240)	Cooling	A	0.14/0.14/0.14	0.14/0.14/0.14	0.14/0.14/0.14	0.14/0.14/0.14	0.14/0.14/0.14				
	Heating	A	0.14/0.14/0.14	0.14/0.14/0.14	0.14/0.14/0.14	0.14/0.14/0.14	0.14/0.14/0.14				
Sound pressure level (measured in anechoic room)		dB <A>	-			-					
Applicable temperature range of installation site		°C (D.B.)	0~32			0~32					
External finish			Galvanized steel plate			Galvanized steel plate					
Connectable outdoor unit			-			-					
Indoor unit capacity connectable to 1 branch			Model W/WP/WL80 or smaller (Use optional joint pipe combining 2 branches when the total unit capacity exceeds W/WP/WL80.)			Model W/WP/WL80 or smaller (Use optional joint pipe combining 2 branches when the total unit capacity exceeds W/WP/WL80.)					
External dimension HxWxD		mm	310 x 930 x 630			310 x 1,210 x 630					
		in.	12-1/4 x 36-5/8 x 24-13/16			12-1/4 x 47-11/16 x 24-13/16					
Water piping diameter (Horizontal type HBC Connection)											
Connection size	To Main HBC	Inlet / Outlet	mm O.D.	28			28				
	To Indoor unit	Inlet / Outlet	mm O.D.	22			22				
Field pipe size	Total down-stream Indoor unit capacity			W/WP/WL10-50		W/WP/WL51-125		W/WP/WL10-50		W/WP/WL51-125	
	To Main HBC	Inlet / Outlet	mm O.D.	20		20		20		20	
	To Indoor Unit	Inlet / Outlet	mm O.D.	20		30		20		30	
Water piping diameter (Vertical type HBC Connection)											
Connection size	To Main HBC	Inlet / Outlet	mm O.D.	28			28				
	To Indoor unit	Inlet / Outlet	mm O.D.	22			22				
Field pipe size	Inlet / Outlet	mm I.D. (Min)	Total down-stream Indoor unit capacity	Piping length from Main-HBC to farthest Indoor unit			Total down-stream Indoor unit capacity	Piping length from Main-HBC to farthest Indoor unit			
				Max 20m	Max 40m	Max 60m		Max 20m	Max 40m	Max 60m	
			W/WP/WL10	12	12	12	W/WP/WL10	12	12	12	
			W/WP/WL11 - 15	12	12	15.5	W/WP/WL11 - 15	12	12	15.5	
			W/WP/WL16 - 25	15.5	15.5	15.5	W/WP/WL16 - 25	15.5	15.5	15.5	
			W/WP/WL26 - 32	15.5	19.9	19.9	W/WP/WL26 - 32	15.5	19.9	19.9	
			W/WP/WL33 - 50	19.9	19.9	19.9	W/WP/WL33 - 50	19.9	19.9	19.9	
			W/WP/WL51 - 63	19.9	25.2	25.2	W/WP/WL51 - 63	19.9	25.2	25.2	
			W/WP/WL64 - 80	25.2	25.2	25.2	W/WP/WL64 - 80	25.2	25.2	25.2	
			W/WP/WL81 - 100	25.2	25.2	32.6	W/WP/WL81 - 100	25.2	25.2	32.6	
			W/WP/WL101 - 150	32.6	32.6	32.6	W/WP/WL101 - 150	32.6	32.6	32.6	
			W/WP/WL151 - 250	32.6	32.6	39.6	W/WP/WL151 - 250	32.6	32.6	39.6	
			W/WP/WL251 - 300	32.6	39.6	50.8	W/WP/WL251 - 300	32.6	39.6	50.8	
W/WP/WL301 - 750	50.8	50.8	50.8	W/WP/WL301 - 750	50.8	50.8	50.8				
Field drain pipe size			mm (in.)	O.D. 32 (1-1/4)			O.D. 32 (1-1/4)				
Net weight			kg (lbs)	40 (89) [45 (100) with water]			53 (117) [62 (137) with water]				
Standard attachment	Accessories		Drain Connection pipe, Washer, Tie band			Drain Connection pipe, Washer, Tie band					
Optional parts			-			-					

Notes :

- Installation/foundation work, electrical connection work, duct work, insulation work, power source switch, and other items shall be referred to the Installation Manual.
- This unit is for water.
- Install this unit in a location where noise (refrigerant noise) emitted by the unit will not disturb the neighbors. (For use in quiet environments with low background noise, position the Sub HBC at least 5 m away from any indoor units.)
- Please install the Sub HBC in a place where noise will not be an issue.
- Please attach an expansion vessel (field supply).
- Please use copper or plastic pipes for the water circuit. Do not use steel or stainless steel pipework. Furthermore, when using copper pipe-work use a non-oxidative brazing method. Oxidation of the pipe-work will reduce the pump life.
- When brazing the pipes, be sure to braze, after covering a wet cloth to the insulation pipes of the units in order to prevent it from burning and shrinking by heat.
- Please install an air purge valve where air will gather in the water circuit.
- Please refer to the DATA BOOK or the Installation Manual for the specified water quality.
- This unit is not designed for outside installations.
- Please always make water circulate or pull out the circulation water completely when not using it. *Please do not use it as a drinking water.
- Please do not use ground water and well water.
- When installing Sub HBC in an environment which may drop below 0 °C, please add antifreeze liquid to the circulating water. (Refer to the DATA BOOK and the Installation Manual).
- Can't use singleness (MAIN HBC is necessary).

Slim Ceiling Concealed



Model	PEFY-WP10VMS1-E		PEFY-WP15VMS1-E		PEFY-WP20VMS1-E		PEFY-WP25VMS1-E		
Power Source	1-phase 220-230-240 V 50/60 Hz								
Cooling capacity (Nominal)	*1	kW	1.2	1.7	2.2	2.8			
	*1	BTU/h	4,100	5,800	7,500	9,600			
	*2	Power input	kW	0.030	0.050	0.051	0.060		
	*2	Current input	A	0.21	0.44	0.49	0.51		
Heating capacity (Nominal)	*3	kW	1.4	1.9	2.5	3.2			
	*3	BTU/h	4,800	6,500	8,500	10,900			
	*2	Power input	kW	0.030	0.030	0.031	0.040		
	*2	Current input	A	0.21	0.33	0.38	0.40		
External finish	Galvanized steel plate		Galvanized steel plate		Galvanized steel plate		Galvanized steel plate		
External dimension H x W x D	mm		200 x 790 x 700		200 x 790 x 700		200 x 790 x 700		
	in.		7-7/8 x 31-1/8 x 27-9/16		7-7/8 x 31-1/8 x 27-9/16		7-7/8 x 31-1/8 x 27-9/16		
Net weight	kg (lbs)		19 (42)		20 (45)		20 (45)		
Heat exchanger	Cross fin (Aluminum fin and copper tube)								
FAN	Water Volume		0.4		0.7		0.9		
	Type x Quantity		Sirocco fan x 2		Sirocco fan x 2		Sirocco fan x 2		
	*4	External static press.	Pa	<5> - 15 - <35> - <50>	<5> - 15 - <35> - <50>	<5> - 15 - <35> - <50>	<5> - 15 - <35> - <50>		
			mmH ₂ O	<0.5> - 1.5 - <3.6> - <5.1>	<0.5> - 1.5 - <3.6> - <5.1>	<0.5> - 1.5 - <3.6> - <5.1>	<0.5> - 1.5 - <3.6> - <5.1>		
		Motor Type	DC motor		DC motor		DC motor		
		Motor output	kW		0.096		0.096		
		Driving mechanism	Direct-driven by motor (Low-Mid-High)		Direct-driven by motor (Low-Mid-High)		Direct-driven by motor (Low-Mid-High)		
	Air flow rate		m ³ /min		5.0 - 6.0 - 7.0		5.5 - 6.5 - 8.0		
			L/s		83 - 100 - 117		92 - 108 - 133		
			cfm		141 - 159 - 177		194 - 230 - 282		
Sound pressure level (measured in anechoic room)	*2	dB <A>	20-23-25		22-24-28		23-25-29		
Insulation material	EPS, Polyethylene foam, Urethane foam								
Air filter	PP honeycomb fabric.		PP honeycomb fabric.		PP honeycomb fabric.		PP honeycomb fabric.		
Protection device	Fuse								
Connectable HBC	CMB-WM-V-AA, CMB-WM-F-AA, CMB-WM-V-BB								
Water piping diameter	*5 *6	Connection size	Inlet	Rc 3/4 screw		Rc 3/4 screw		Rc 3/4 screw	
		Outlet	in.		Rc 3/4 screw		Rc 3/4 screw		
Field pipe size	*5 *6	Inlet	mm I.D.		20		20		
		Outlet	mm I.D.		20		20		
Field drain pipe size	mm (in.)		O.D.32 (1-1/4)		O.D.32 (1-1/4)		O.D.32 (1-1/4)		
Standard attachment	Accessory		Insulation pipe for water pipe, Washer, Drain hose, Tie band						
Optional parts	Control Box Replace kit		PAC-KE70HS-E		PAC-KE70HS-E		PAC-KE70HS-E		

Model	PEFY-WP32VMS1-E		PEFY-WP40VMS1-E		PEFY-WP50VMS1-E			
Power source	1-phase 220-230-240 V 50/60 Hz							
Cooling capacity (Nominal)	*1	kW	3.6	4.5	5.6			
	*1	BTU/h	12,300	15,400	19,100			
	*2	Power input	kW	0.071	0.090	0.090		
	*2	Current input	A	0.61	0.73	0.77		
Heating capacity (Nominal)	*3	kW	4.0	5.0	6.3			
	*3	BTU/h	13,600	17,100	21,500			
	*2	Power input	kW	0.051	0.070	0.070		
	*2	Current input	A	0.50	0.62	0.66		
External finish	Galvanized steel plate		Galvanized steel plate		Galvanized steel plate			
External dimension H x W x D	mm		200 x 990 x 700		200 x 1,190 x 700			
	in.		7-7/8 x 39 x 27-9/16		7-7/8 x 46-7/8 x 27-9/16			
Net weight	kg (lbs)		25 (56)		27 (60)			
Heat exchanger	Cross fin (Aluminum fin and copper tube)							
FAN	Water Volume		1.0		1.7			
	Type x Quantity		Sirocco fan x 3		Sirocco fan x 4			
	*4	External static press.	Pa	<5> - 15 - <35> - <50>	<5> - 15 - <35> - <50>	<5> - 15 - <35> - <50>		
			mmH ₂ O	<0.5> - 1.5 - <3.6> - <5.1>	<0.5> - 1.5 - <3.6> - <5.1>	<0.5> - 1.5 - <3.6> - <5.1>		
		Motor Type	DC motor		DC motor			
		Motor output	kW		0.096			
		Driving mechanism	Direct-driven by motor (Low-Mid-High)		Direct-driven by motor (Low-Mid-High)			
	Air flow rate		m ³ /min		8.0 - 9.0 - 11.0			
			L/s		133 - 150 - 183			
			cfm		282 - 318 - 388			
Sound pressure level (measured in anechoic room)	*2	dB <A>	28-30-33		30-32-35			
Insulation material	EPS, Polyethylene foam, Urethane foam							
Air filter	PP honeycomb fabric.		PP honeycomb fabric.		PP honeycomb fabric.			
Protection device	Fuse							
Connectable HBC	CMB-WM-V-AA, CMB-WM-F-AA, CMB-WM-V-BB							
Water piping diameter	*5 *6	Connection size	Inlet	Rc 3/4 screw		Rc 3/4 screw		
		Outlet	in.		Rc 3/4 screw			
Field pipe size	*5 *6	Inlet	mm I.D.		20			
		Outlet	mm I.D.		20			
Field drain pipe size	mm (in.)		O.D.32 (1-1/4)		O.D.32 (1-1/4)			
Standard attachment	Accessory		Insulation pipe for water pipe, Washer, Drain hose, Tie band					
Optional parts	Control Box Replace kit		PAC-KE70HS-E		PAC-KE70HS-E			

Notes :

- Nominal cooling conditions Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B. (95°F D.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- The values are measured at the factory setting of external static pressure.
- Nominal heating conditions Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).

- The factory setting of external static pressure is shown without < >. Refer to "Fan characteristics curves", according to the external static pressure, in DATA BOOK for the usable range of air flow rate.
- Be sure to install a valve on the water outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters. *Please group units that operate on 1 branch.

Unit Converter

BTU / h = kW x 3.412
 cfm = m³ / min x 35.31
 lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.

Ceiling Concealed



Model		PEFY-WP20VMA-E	PEFY-WP25VMA-E	PEFY-WP32VMA-E	PEFY-WP40VMA-E	PEFY-WP50VMA-E
Power source		1-phase 220-230-240 V 50/60 Hz				
Cooling capacity (Nominal)	*1 kW	2.2	2.8	3.6	4.5	5.6
	*1 BTU/h	7,500	9,600	12,300	15,400	19,100
	*2 Power input kW	0.07	0.09	0.11	0.14	0.14
	*2 Current input A	0.55	0.64	0.74	1.15	1.15
Heating capacity (Nominal)	*3 kW	2.5	3.2	4.0	5.0	6.3
	*3 BTU/h	8,500	10,900	13,600	17,100	21,500
	*2 Power input kW	0.05	0.07	0.09	0.12	0.12
	*2 Current input A	0.44	0.53	0.63	1.04	1.04
External finish		Galvanized steel plate	Galvanized steel plate	Galvanized steel plate	Galvanized steel plate	Galvanized steel plate
External dimension H x W x D		mm 250 x 700 x 732	mm 250 x 900 x 732	mm 250 x 900 x 732	mm 250 x 1,100 x 732	mm 250 x 1,100 x 732
Net weight		kg (lbs) 21 (47)	kg (lbs) 26 (58)	kg (lbs) 26 (58)	kg (lbs) 31 (69)	kg (lbs) 31 (69)
Heat exchanger		Cross fin (Aluminum fin and copper tube)				
FAN		Water Volume L				
Type x Quantity		Sirocco fan x 1				
*4 External static press.	Pa	<35> -50 - <70> - <100> - <150> <35> -50 - <70> - <100> - <150> <35> -50 - <70> - <100> - <150> <35> -50 - <70> - <100> - <150> <35> -50 - <70> - <100> - <150>				
	mmH ₂ O	<36> -51 - <71> - <102> - <153> <36> -51 - <71> - <102> - <153> <36> -51 - <71> - <102> - <153> <36> -51 - <71> - <102> - <153> <36> -51 - <71> - <102> - <153>				
Motor Type		DC motor				
Motor output kW		0.085				
Driving mechanism		Direct-driven by motor				
Air flow rate		(Low-Mid-High)				
		m ³ /min 7.5 - 9.0 - 10.5				
		L/s 125 - 150 - 175				
		cfm 265 - 318 - 371				
Sound pressure level (measured in anechoic room)		*2 dB <A> 23-26-29				
Insulation material		EPS, Polyethylene foam, Urethane foam				
Air filter		PP honeycomb fabric.				
Protection device		Fuse				
Connectable HBC		CMB-WM-V-AA, CMB-WM-F-AA, CMB-WM-V-BB				
Water piping diameter		Rc 3/4 screw				
*5 *6	Connection size	Rc 3/4 screw				
	Field pipe size	Rc 3/4 screw				
Field drain pipe size		mm (in.) 20				
Standard attachment		mm (in.) 20				
Optional parts		O.D.32 (1-1/4)				

Model		PEFY-WP63VMA-E	PEFY-WP71VMA-E	PEFY-WP80VMA-E	PEFY-WP100VMA-E	PEFY-WP125VMA-E
Power source		1-phase 220-230-240 V 50/60 Hz				
Cooling capacity (Nominal)	*1 kW	7.1	8.0	9.0	11.2	14.0
	*1 BTU/h	24,200	27,300	30,700	38,200	47,800
	*2 Power input kW	0.14	0.24	0.24	0.24	0.36
	*2 Current input A	1.15	1.47	1.47	1.47	2.21
Heating capacity (Nominal)	*3 kW	8.0	9.0	10.0	12.5	16.0
	*3 BTU/h	27,300	30,700	34,100	42,700	54,600
	*2 Power input kW	0.12	0.22	0.22	0.22	0.34
	*2 Current input A	1.04	1.36	1.36	1.36	2.10
External finish		Galvanized steel plate	Galvanized steel plate	Galvanized steel plate	Galvanized steel plate	Galvanized steel plate
External dimension H x W x D		mm 250 x 1,100 x 732	mm 250 x 1,400 x 732	mm 250 x 1,400 x 732	mm 250 x 1,400 x 732	mm 250 x 1,600 x 732
Net weight		kg (lbs) 31 (69)	kg (lbs) 40 (89)	kg (lbs) 40 (89)	kg (lbs) 40 (89)	kg (lbs) 42 (93)
Heat exchanger		Cross fin (Aluminum fin and copper tube)				
FAN		Water Volume L				
Type x Quantity		Sirocco fan x 2				
*4 External static press.	Pa	<35> -50 - <70> - <100> - <150> <35> -50 - <70> - <100> - <150> <35> -50 - <70> - <100> - <150> <35> -50 - <70> - <100> - <150> <35> -50 - <70> - <100> - <150>				
	mmH ₂ O	<36> -51 - <71> - <102> - <153> <36> -51 - <71> - <102> - <153> <36> -51 - <71> - <102> - <153> <36> -51 - <71> - <102> - <153> <36> -51 - <71> - <102> - <153>				
Motor Type		DC motor				
Motor output kW		0.121				
Driving mechanism		Direct-driven by motor				
Air flow rate		(Low-Mid-High)				
		m ³ /min 14.5 - 18.0 - 21.0				
		L/s 242 - 300 - 350				
		cfm 512 - 636 - 742				
Sound pressure level (measured in anechoic room)		*2 dB <A> 26-29-34				
Insulation material		EPS, Polyethylene foam, Urethane foam				
Air filter		PP honeycomb fabric.				
Protection device		Fuse				
Connectable HBC		CMB-WM-V-AA, CMB-WM-F-AA, CMB-WM-V-BB				
Water piping diameter		Rc 1-1/4 screw				
*5 *6	Connection size	Rc 1-1/4 screw				
	Field pipe size	Rc 1-1/4 screw				
Field drain pipe size		mm (in.) 30				
Standard attachment		mm (in.) 30				
Optional parts		O.D.32 (1-1/4)				

Notes :

- Nominal cooling conditions Indoor: 27°CDB./19°CWB. (81°FDB./66°FWB.), Outdoor: 35°CDB. (95°FDB.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- The values are measured at the factory setting of external static pressure.
- Nominal heating conditions Indoor: 20°CDB. (68°FDB.), Outdoor: 7°CDB. (45°FDB./43°FWB.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).


- The factory setting of external static pressure is shown without < >. Refer to "Fan characteristics curves", according to the external static pressure, in DATA BOOK for the usable range of air flow rate.
- Be sure to install a valve on the water outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters. *Please group units that operate on 1 branch.

Unit Converter

BTU / h = kW x 3.412
cfm = m³ / min x 35.31
lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.

Ceiling Concealed

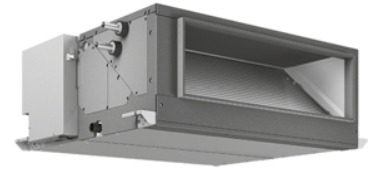

Model	PEFY-WL40VMHS-A		PEFY-WL50VMHS-A		PEFY-WL63VMHS-A		PEFY-WL71VMHS-A	
Power source	1-phase 220-230-240 V 50/60 Hz							
Cooling capacity (Nominal)	*1 kW	4.5	5.6	7.1	8.0			
	*1 BTU/h	15,400	19,100	24,200	27,300			
	*2 Power input kW	0.055	0.077	0.095	0.075			
	*2 Current input A	0.41-0.39-0.38 (220-230-240 V)	0.58-0.55-0.52 (220-230-240 V)	0.70-0.67-0.64 (220-230-240 V)	0.54-0.52-0.50 (220-230-240 V)			
Heating capacity (Nominal)	*3 kW	5.0	6.3	8.0	9.0			
	*3 BTU/h	17,100	21,500	27,300	30,700			
	*2 Power input kW	0.055	0.077	0.095	0.075			
	*2 Current input A	0.41-0.39-0.38 (220-230-240 V)	0.58-0.55-0.52 (220-230-240 V)	0.70-0.67-0.64 (220-230-240 V)	0.54-0.52-0.50 (220-230-240 V)			
External finish	Galvanized steel plate							
External dimension H x W x D	mm	380 x 745 x 900	380 x 745 x 900	380 x 745 x 900	380 x 1,030 x 900			
	in.	15 x 29-3/8 x 35-7/16	15 x 29-3/8 x 35-7/16	15 x 29-3/8 x 35-7/16	15 x 40-9/16 x 35-7/16			
Net weight	kg (lbs)	35 (78)	35 (78)	36 (80)	45 (100)			
Heat exchanger	Cross fin (Aluminum fin and copper tube)							
FAN	Water Volume L	1.4	1.4	1.8	1.8			
	Type x Quantity	Sirocco fan x 1	Sirocco fan x 1	Sirocco fan x 1	Sirocco fan x 2			
	*4 External static press. Pa	50 - <100> - <150> - <200>	50 - <100> - <150> - <200>	50 - <100> - <150> - <200>	50 - <100> - <150> - <200>			
		5.1 - <10.2> - <15.3> - <20.4>	5.1 - <10.2> - <15.3> - <20.4>	5.1 - <10.2> - <15.3> - <20.4>	5.1 - <10.2> - <15.3> - <20.4>			
	Motor Type	DC motor	DC motor	DC motor	DC motor			
	Motor output kW	0.121	0.121	0.121	0.244			
	Driving mechanism	Direct-driven by motor	Direct-driven by motor	Direct-driven by motor	Direct-driven by motor			
	Air flow rate	(Low-Mid-High)	(Low-Mid-High)	(Low-Mid-High)	(Low-Mid-High)			
	m ³ /min	10.0 - 12.0 - 14.0	13.0 - 15.0 - 18.0	13.5 - 16.0 - 19.0	15.5 - 18.0 - 22.0			
	L/s	167 - 200 - 233	217 - 250 - 300	225 - 267 - 317	258 - 300 - 367			
	cfm	353 - 424 - 494	459 - 530 - 636	477 - 565 - 671	547 - 636 - 777			
Sound pressure level (measured in anechoic room)	*2 dB <A>	22.0-25.0-29.0	24.0-27.0-32.0	25.5-28.5-32.5	24.0-27.0-31.0			
Insulation material	Polystyrene foam, Polyethylene foam, Urethane foam							
Air filter	Option: Synthetic fiber unwoven cloth filter (long life filter) and filter box are recommended.							
Protection device	Fuse		Fuse	Fuse	Fuse			
Connectable HBC	CMB-WM-V-AA, CMB-WM-F-AA, CMB-WM-V-BB							
Water piping diameter	Connection size	Inlet mm O.D.	22	22	22	22		
		Outlet mm O.D.	22	22	22	22		
	Field pipe size	Inlet mm I.D.	20	20	30	30		
		Outlet mm I.D.	20	20	30	30		
Field drain pipe size	mm (in.)							
Standard attachment	Accessory		Washer, Drain hose, Tie band	Washer, Drain hose, Tie band	Washer, Drain hose, Tie band	Washer, Drain hose, Tie band		
Optional parts	Drain pump kit		PAC-DRP10DP-E2	PAC-DRP10DP-E2	PAC-DRP10DP-E2	PAC-DRP10DP-E2		
	Long life filter		PAC-KE86LAF	PAC-KE86LAF	PAC-KE86LAF	PAC-KE86LAF		
	Filter box		PAC-KE63TB-F	PAC-KE63TB-F	PAC-KE63TB-F	PAC-KE99TB-F		
	Valve kit		PAC-SK35VK-E	PAC-SK35VK-E	PAC-SK35VK-E	PAC-SK35VK-E		
	6m Lead wire		PAC-SK40LW-E	PAC-SK40LW-E	PAC-SK40LW-E	PAC-SK40LW-E		
	Attachment plate		PAC-SK39AP-E	PAC-SK39AP-E	PAC-SK39AP-E	PAC-SK39AP-E		

Notes :

- Nominal cooling conditions Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B. (95°F D.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- The values are measured at the factory setting of external static pressure.
- Nominal heating conditions Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- The factory setting of airflow mode and external static pressure mode is shown without < >. Refer to "Fan characteristics curves", according to the external static pressure, in DATA BOOK for the usable range of air flow rate.
- Be sure to install a valve on the water inlet/outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters.

- Certain restrictions apply to indoor unit combinations. Refer to the section on the valve kit in the chapter "OPTIONAL PARTS" in the DATA BOOK for the restrictions. When the valve kit is installed farther away from the HBC than the distance between the HBC and the WL model indoor unit, the maximum allowable height difference between the HBC and the valve kit is 15 meters. The maximum allowable piping length between the indoor unit and the valve kit is 5 meters.
*Please group units that operate on 1 branch.
*Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.
*Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU / h = kW x 3.412
 cfm = m³ / min x 35.31
 lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.

Ceiling Cassette



Model			PLFY-WL20VEM-E	PLFY-WL25VEM-E	PLFY-WL32VEM-E	PLFY-WL40VEM-E	PLFY-WL50VEM-E	
Power source			1-phase 220-240 V 50 Hz, 1-phase 220V 60 Hz					
Cooling capacity (Nominal)	*1	kW	2.2	2.8	3.6	4.5	5.6	
	*1	BTU/h	7,500	9,600	12,300	15,400	19,100	
Power input		kW	0.03	0.03	0.03	0.03	0.04	
		A	0.26	0.29	0.33	0.35	0.40	
Heating capacity (Nominal)	*2	kW	2.5	3.2	4.0	5.0	6.3	
	*2	BTU/h	8,500	10,900	13,600	17,100	21,500	
Power input		kW	0.03	0.03	0.03	0.03	0.04	
		A	0.20	0.23	0.27	0.29	0.34	
External finish			Galvanized steel sheet	Galvanized steel sheet	Galvanized steel sheet	Galvanized steel sheet	Galvanized steel sheet	
External dimension H x W x D	mm		258 × 840 × 840	258 × 840 × 840	258 × 840 × 840	258 × 840 × 840	258 × 840 × 840	
	in.		10-3/16 × 33-1/16 × 33-1/16	10-3/16 × 33-1/16 × 33-1/16	10-3/16 × 33-1/16 × 33-1/16	10-3/16 × 33-1/16 × 33-1/16	10-3/16 × 33-1/16 × 33-1/16	
Net weight	kg (lbs)		18 (40)	18 (40)	20 (44)	20 (44)	20 (44)	
Decoration panel	Model		PLP-6EA	PLP-6EA	PLP-6EA	PLP-6EA	PLP-6EA	
	External finish		MUNSELL (1.0Y 9.2/0.2)	MUNSELL (1.0Y 9.2/0.2)	MUNSELL (1.0Y 9.2/0.2)	MUNSELL (1.0Y 9.2/0.2)	MUNSELL (1.0Y 9.2/0.2)	
	mm		40 x 950 x 950	40 x 950 x 950	40 x 950 x 950	40 x 950 x 950	40 x 950 x 950	
	Dimension H x W x D	in.		1-9/16 x 37-13/32 x 37-13/32	1-9/16 x 37-13/32 x 37-13/32	1-9/16 x 37-13/32 x 37-13/32	1-9/16 x 37-13/32 x 37-13/32	1-9/16 x 37-13/32 x 37-13/32
		kg (lbs)		5 (11)	5 (11)	5 (11)	5 (11)	5 (11)
Heat exchanger			Cross fin (Aluminum fin and copper tube)					
Water Volume		L	1.0	1.0	1.8	1.8	1.8	
FAN	Type x Quantity		Turbo Fan × 1	Turbo Fan × 1	Turbo Fan × 1	Turbo Fan × 1	Turbo Fan × 1	
	External static press.	Pa	0	0	0	0	0	
		mmH ₂ O	0	0	0	0	0	
	Motor Type		DC motor	DC motor	DC motor	DC motor	DC motor	
	Motor output		kW	0.050	0.050	0.050	0.050	
	Driving mechanism		Direct-driven by motor	Direct-driven by motor	Direct-driven by motor	Direct-driven by motor	Direct-driven by motor	
	Air flow rate		(Low-Mid2-Mid1-High)	(Low-Mid2-Mid1-High)	(Low-Mid2-Mid1-High)	(Low-Mid2-Mid1-High)	(Low-Mid2-Mid1-High)	
	m ³ /min		12-13-14-15	12-13-15-17	14-15-16-17	14-15-16-17	14-16-18-20	
	L/s		200-217-233-250	200-217-250-283	233-250-267-283	233-250-267-283	233-267-300-333	
	cfm		424-459-494-530	424-459-530-600	494-530-565-600	494-530-565-600	494-565-636-706	
Sound pressure level (measured in anechoic room)		dB <A>	(Low-Mid2-Mid1-High) 24-26-27-28	(Low-Mid2-Mid1-High) 24-26-28-30	(Low-Mid2-Mid1-High) 26-27-29-30	(Low-Mid2-Mid1-High) 26-28-29-31	(Low-Mid2-Mid1-High) 27-29-31-33	
Insulation material			PS	PS	PS	PS		
Air filter			PP honeycomb	PP honeycomb	PP honeycomb	PP honeycomb		
Protection device			Fuse	Fuse	Fuse	Fuse		
Connectable HBC			CMB-WM-V-AA, CMB-WM-F-AA, CMB-WM-V-BB					
Water piping diameter *3 *4	Connection size	Inlet mm O.D.	22	22	22	22	22	
		Outlet mm O.D.	22	22	22	22	22	
	Field pipe size	Inlet mm I.D.	20	20	20	20	20	
		Outlet mm I.D.	20	20	20	20	20	
Field drain pipe size		mm (in.)	O.D.32 (1-1/4)	O.D.32 (1-1/4)	O.D.32 (1-1/4)	O.D.32 (1-1/4)	O.D.32 (1-1/4)	
Optional parts	Decoration panel *5		PLP-6EA/PLP-6EAE/PLP-6EAL/PLP-6EAL	PLP-6EA/PLP-6EAE/PLP-6EAL/PLP-6EAL	PLP-6EA/PLP-6EAE/PLP-6EAL/PLP-6EAL	PLP-6EA/PLP-6EAE/PLP-6EAL/PLP-6EAL	PLP-6EA/PLP-6EAE/PLP-6EAL/PLP-6EAL	
	3D i-see Sensor corner panel		PAC-SE1ME-E	PAC-SE1ME-E	PAC-SE1ME-E	PAC-SE1ME-E	PAC-SE1ME-E	
	Wireless signal receiver		PAR-SE9FA-E	PAR-SE9FA-E	PAR-SE9FA-E	PAR-SE9FA-E	PAR-SE9FA-E	
	Valve kit *6		PAC-SK35VK-E	PAC-SK35VK-E	PAC-SK35VK-E	PAC-SK35VK-E	PAC-SK35VK-E	
	6m Lead wire		PAC-SK40LW-E	PAC-SK40LW-E	PAC-SK40LW-E	PAC-SK40LW-E	PAC-SK40LW-E	
	Attachment plate		PAC-SK39AP-E	PAC-SK39AP-E	PAC-SK39AP-E	PAC-SK39AP-E	PAC-SK39AP-E	

Notes :

- Nominal cooling conditions Indoor: 27°CDB./19°CWB. (81°FDB./66 °FW.B.), Outdoor: 35°CDB. (95°FDB.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions Indoor: 20°CDB. (68°FDB.), Outdoor: 7°CDB./6°CWB. (45°FDB./43°FWB.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Be sure to install a valve on the water outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters.
- PLFY-WL-VEM-E should be used together with Decoration panel.
- Certain restrictions apply to indoor unit combinations. Refer to the section on the valve kit in the chapter "OPTIONAL PARTS" in the DATA BOOK for the

restrictions. When the valve kit is installed farther away from the HBC than the distance between the HBC and the WL-model indoor unit, the maximum allowable height difference between the HBC and the valve kit is 15 meters. The maximum allowable piping length between the indoor unit and the valve kit is 5 meters.

*Please group units that operate on 1 branch.

*Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.

*Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU / h = kW x 3.412
 cfm = m³ / min x 35.31
 lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.

Ceiling Cassette



Model				PLFY-WL63VEM-E	PLFY-WL80VEM-E	PLFY-WL100VEM-E	PLFY-WL125VEM-E	
Power source				1-phase 220-240 V 50 Hz, 1-phase 220V 60 Hz				
Cooling capacity (Nominal)	*1	kW	7.1	9.0	11.2	14.0		
	*1	BTU/h	24,200	30,700	38,200	47,800		
		Power input	kW	0.04	0.05	0.08	0.11	
		Current input	A	0.40	0.46	0.66	1.05	
Heating capacity (Nominal)	*2	kW	8.0	10.0	12.5	16.0		
	*2	BTU/h	27,300	34,100	42,700	54,600		
		Power input	kW	0.04	0.05	0.08	0.11	
		Current input	A	0.34	0.40	0.60	0.99	
External finish				Galvanized steel sheet				
External dimension H x W x D				mm	298 × 840 × 840	298 × 840 × 840	298 × 840 × 840	
				in.	11-3/4 × 33-1/16 × 33-1/16	11-3/4 × 33-1/16 × 33-1/16	11-3/4 × 33-1/16 × 33-1/16	11-3/4 × 33-1/16 × 33-1/16
Net weight				kg (lbs)	23 (51)	23 (51)	23 (51)	
Decoration panel				PLP-6EA				
Model				PLP-6EA				
External finish				MUNSELL (1.0Y 9.2/0.2)				
Dimension H x W x D				mm	40 x 950 x 950	40 x 950 x 950	40 x 950 x 950	
				in.	1-9/16 x 37-13/32 x 37-13/32	1-9/16 x 37-13/32 x 37-13/32	1-9/16 x 37-13/32 x 37-13/32	1-9/16 x 37-13/32 x 37-13/32
Net weight				kg (lbs)	5 (11)	5 (11)	5 (11)	
Heat exchanger				Cross fin (Aluminum fin and copper tube)				
Water Volume				L	2.1	2.1	2.2	
FAN				Turbo Fan × 1				
Type x Quantity				Turbo Fan × 1				
External static press.				Pa	0	0	0	
				mmH ₂ O	0	0	0	0
Motor Type				DC motor				
Motor output				kW	0.120	0.120	0.120	
Driving mechanism				Direct-driven by motor				
Air flow rate				Direct-driven by motor				
				(Low-Mid2-Mid1-High)				
				(Low-Mid2-Mid1-High)				
				(Low-Mid2-Mid1-High)				
				(Low-Mid2-Mid1-High)				
				m ³ /min				
				15-17-19-21				
				15-18-21-23				
				19-23-26-30				
				20-25-30-35				
				L/s				
				250-283-317-350				
				250-300-350-383				
				317-383-433-500				
				333-417-500-583				
				cfm				
				530-600-671-742				
				530-636-742-812				
				671-812-918-1059				
				706-883-1059-1236				
Sound pressure level (measured in anechoic room)				dB <A>	27-29-31-33	27-30-33-35	31-35-37-40	33-37-40-46
Insulation material				PS				
Air filter				PP honeycomb				
Protection device				Fuse				
Connectable HBC				CMB-WM-V-AA, CMB-WM-F-AA, CMB-WM-V-BB				
Water piping diameter				Fuse				
Connection size				Inlet	mm O.D.	22	22	
				Outlet	mm O.D.	22	22	
Field pipe size				Inlet	mm I.D.	30	30	
				Outlet	mm I.D.	30	30	
Field drain pipe size				mm (in.)	O.D.32 (1-1/4)	O.D.32 (1-1/4)	O.D.32 (1-1/4)	
Optional parts				Decoration panel				
				*5				
				PLP-6EA/PLP-6EAE/PLP-6EAL/PLP-6EAL				
				PLP-6EA/PLP-6EAE/PLP-6EAL/PLP-6EAL				
				PLP-6EA/PLP-6EAE/PLP-6EAL/PLP-6EAL				
				PLP-6EA/PLP-6EAE/PLP-6EAL/PLP-6EAL				
3D i-see Sensor corner panel				PAC-SE1ME-E				
Wireless signal receiver				PAR-SE9FA-E				
Valve kit				*6				
				PAC-SK35VK-E				
				PAC-SK35VK-E				
				PAC-SK35VK-E				
				PAC-SK35VK-E				
6m Lead wire				PAC-SK40LW-E				
				PAC-SK40LW-E				
				PAC-SK40LW-E				
Attachment plate				PAC-SK39AP-E				
				PAC-SK39AP-E				
				PAC-SK39AP-E				
				PAC-SK39AP-E				

Notes :

- Nominal cooling conditions Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B. (95°F D.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Be sure to install a valve on the water outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters.
- PLFY-WL-VEM-E should be used together with Decoration panel.
- Certain restrictions apply to indoor unit combinations. Refer to the section on the valve kit in the chapter "OPTIONAL PARTS" in the DATA BOOK for the

restrictions. When the valve kit is installed farther away from the HBC than the distance between the HBC and the WL-model indoor unit, the maximum allowable height difference between the HBC and the valve kit is 15 meters. The maximum allowable piping length between the indoor unit and the valve kit is 5 meters.

*Please group units that operate on 1 branch.

*Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.

*Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU / h = kW x 3.412
 cfm = m³ / min x 35.31
 lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.

Compact Ceiling Cassette



Model			PLFY-WL10VFM-E	PLFY-WL15VFM-E	PLFY-WL20VFM-E	
Power source			1-phase 220-240 V 50 Hz, 1-phase 220V 60 Hz			
Cooling capacity (Nominal)	*1	kW	1.2	1.7	2.2	
	*1	BTU/h	4,100	5,800	7,500	
		Power input	0.02	0.02	0.02	
		Current input	A	0.23	0.26	
Heating capacity (Nominal)	*2	kW	1.4	1.9	2.5	
	*2	BTU/h	4,800	6,500	8,500	
		Power input	0.02	0.02	0.02	
		Current input	A	0.17	0.20	
External finish			Galvanized steel sheet	Galvanized steel sheet	Galvanized steel sheet	
External dimension H x W x D			mm	208 × 570 × 570	208 × 570 × 570	
			in.	8-1/4 × 22-1/2 × 22-1/2	8-1/4 × 22-1/2 × 22-1/2	8-1/4 × 22-1/2 × 22-1/2
Net weight			kg (lbs)	13 (29)	14 (31)	
Decoration panel	Model		SLP-2FA(L)(E)	SLP-2FA(L)(E)	SLP-2FA(L)(E)	
	External finish		MUNSELL (1.0Y 9.2/0.2)	MUNSELL (1.0Y 9.2/0.2)	MUNSELL (1.0Y 9.2/0.2)	
	Dimension	mm	10 x 625 x 625	10 x 625 x 625	10 x 625 x 625	
	H x W x D	in.	3/8 x 24-5/8 x 24-5/8	3/8 x 24-5/8 x 24-5/8	3/8 x 24-5/8 x 24-5/8	
	Net weight		kg (lbs)	3 (7)	3 (7)	
Heat exchanger			Cross fin (Aluminum fin and copper tube)			
Water Volume			L	0.5	0.9	
FAN	Type x Quantity		Turbo Fan × 1	Turbo Fan × 1	Turbo Fan × 1	
	External static press.		Pa	0	0	
			mmH ₂ O	0	0	
	Motor Type		DC motor	DC motor	DC motor	
	Motor output		kW	0.050	0.050	
	Driving mechanism		Direct-driven by motor	Direct-driven by motor	Direct-driven by motor	
	Air flow rate		(Low-Mid-High)	(Low-Mid-High)	(Low-Mid-High)	
			m ³ /min	6.0-6.5-7.0	6.0-7.0-8.0	6.5-7.0-8.0
			L/s	100-108-117	100-117-133	108-117-133
			cfm	212-230-247	230-247-282	230-247-282
Sound pressure level (measured in anechoic room)			dB <A>	25-26-27	25-26-29	27-29-31
Insulation material			PS	PS	PS	
Air filter			PP honeycomb	PP honeycomb	PP honeycomb	
Protection device			Fuse	Fuse	Fuse	
Connectable HBC			CMB-WM-V-AA, CMB-WM-F-AA, CMB-WM-V-BB			
Water piping diameter	*3 *4	Connection size	Inlet	mm O.D.	22	
			Outlet	mm O.D.	22	
	Field pipe size	Inlet	mm I.D.	20	20	20
		Outlet	mm I.D.	20	20	20
Field drain pipe size			mm (in.)	O.D.32 (1-1/4)	O.D.32 (1-1/4)	O.D.32 (1-1/4)
Optional parts	Decoration panel		*5	SLP-2FA/SLP-2FAE/SLP-2FAL/SLP-2FALE		
	3D i-see Sensor corner panel			PAC-SF1ME-E	PAC-SF1ME-E	
	Wireless signal receiver			PAR-SF9FA-E	PAR-SF9FA-E	
	Valve kit		*6	PAC-SK35VK-E	PAC-SK35VK-E	
	6m Lead wire			PAC-SK40LW-E	PAC-SK40LW-E	
Attachment plate				PAC-SK39AP-E	PAC-SK39AP-E	

Notes :

- Nominal cooling conditions Indoor: 27°C D.B./19°C W.B. (81°F D.B./66 °F W.B.), Outdoor: 35°C D.B. (95°F D.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Be sure to install a valve on the water outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters.
- PLFY-WL-VFM-E should be used together with Decoration panel.
- Certain restrictions apply to indoor unit combinations. Refer to the section on the valve kit in the chapter "OPTIONAL PARTS" in the DATA BOOK for the

restrictions. When the valve kit is installed farther away from the HBC than the distance between the HBC and the WL-model indoor unit, the maximum allowable height difference between the HBC and the valve kit is 15 meters. The maximum allowable piping length between the indoor unit and the valve kit is 5 meters.

*Please group units that operate on 1 branch.

*Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.

*Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU / h = kW x 3.412
 cfm = m³ / min x 35.31
 lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.

Compact Ceiling Cassette



Model				PLFY-WL25VFM-E	PLFY-WL32VFM-E	PLFY-WL40VFM-E
Power source				1-phase 220-240 V 50 Hz, 1-phase 220V 60 Hz		
Cooling capacity (Nominal)	*1	kW	2.8	3.6	4.5	
	*1	BTU/h	9,600	12,300	15,400	
		kW	0.03	0.04	0.05	
		A	0.29	0.38	0.46	
Heating capacity (Nominal)	*2	kW	3.2	4.0	5.0	
	*2	BTU/h	10,900	13,600	17,100	
		kW	0.03	0.04	0.05	
		A	0.23	0.32	0.40	
External finish				Galvanized steel sheet		Galvanized steel sheet
External dimension H x W x D				208 x 570 x 570		208 x 570 x 570
				mm		208 x 570 x 570
				in.		8-1/4 x 22-1/2 x 22-1/2
Net weight				14 (31)		14 (31)
Decoration panel				SLP-2FA(L)(E)		SLP-2FA(L)(E)
Model				SLP-2FA(L)(E)		SLP-2FA(L)(E)
External finish				MUNSELL (1.0Y 9.2/0.2)		MUNSELL (1.0Y 9.2/0.2)
Dimension				10 x 625 x 625		10 x 625 x 625
H x W x D				mm		10 x 625 x 625
				in.		3/8 x 24-5/8 x 24-5/8
Net weight				kg (lbs)		3 (7)
Heat exchanger				Cross fin (Aluminum fin and copper tube)		
Water Volume				L		0.9
Type x Quantity				Turbo Fan x 1		Turbo Fan x 1
External static press.				Pa		0
				mmH ₂ O		0
Motor Type				DC motor		DC motor
Motor output				kW		0.050
Driving mechanism				Direct-driven by motor		Direct-driven by motor
Air flow rate				(Low-Mid-High)		(Low-Mid-High)
				m ³ /min		6.5-7.5-9.0
				L/s		108-125-150
				cfm		230-265-318
Sound pressure level (measured in anechoic room)				dB <A>		27-30-34
Insulation material				PS		PS
Air filter				PP honeycomb		PP honeycomb
Protection device				Fuse		Fuse
Connectable HBC				CMB-WM-V-AA, CMB-WM-F-AA, CMB-WM-V-BB		
Water piping diameter				mm O.D.		22
*3 *4				mm O.D.		22
Field pipe size				mm I.D.		20
				mm I.D.		20
Field drain pipe size				mm (in.)		0.D.32 (1-1/4)
Optional parts				SLP-2FA/SLP-2FAE/SLP-2FAL/SLP-2FALE		
Decoration panel				*5		
3D i-see Sensor corner panel				PAC-SF1ME-E		PAC-SF1ME-E
Wireless signal receiver				PAR-SF9FA-E		PAR-SF9FA-E
Valve kit				*6		PAC-SK35VK-E
6m Lead wire				PAC-SK40LW-E		PAC-SK40LW-E
Attachment plate				PAC-SK39AP-E		PAC-SK39AP-E

Notes :

- Nominal cooling conditions Indoor: 27°C D.B./19°C W.B. (81°F D.B./66 °F W.B.), Outdoor: 35°C D.B. (95°F D.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Be sure to install a valve on the water outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters.
- PLFY-WL-VFM-E should be used together with Decoration panel.
- Certain restrictions apply to indoor unit combinations. Refer to the section on the valve kit in the chapter "OPTIONAL PARTS" in the DATA BOOK for the

restrictions. When the valve kit is installed farther away from the HBC than the distance between the HBC and the WL-model indoor unit, the maximum allowable height difference between the HBC and the valve kit is 15 meters. The maximum allowable piping length between the indoor unit and the valve kit is 5 meters.

*Please group units that operate on 1 branch.

*Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.

*Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU / h = kW x 3.412
cfm = m³ / min x 35.31
lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.

Wall Mounted



Model		PKFY-WL10VLM-E	PKFY-WL15VLM-E	PKFY-WL20VLM-E	PKFY-WL25VLM-E	PKFY-WL32VLM-E
Power source		1-phase 220-240 V 50 Hz, 1-phase 220 V 60 Hz				
Cooling capacity (Nominal)	*1 kW	1.2	1.7	2.2	2.8	3.6
	*1 BTU/h	4,100	5,800	7,500	9,600	12,300
	Power input kW	0.02	0.02	0.03	0.04	0.04
Heating capacity (Nominal)	Current input A	0.20	0.20	0.25	0.35	0.35
	*2 kW	1.4	1.9	2.5	3.2	4.0
	*2 BTU/h	4,800	6,500	8,500	10,900	13,600
External finish	Power input kW	0.01	0.01	0.02	0.03	0.03
	Current input A	0.15	0.15	0.20	0.30	0.30
	External dimension H × W × D	Plastic, MUNSELL (0.7PB 9.2/0.4)	Plastic, MUNSELL (0.7PB 9.2/0.4)	Plastic, MUNSELL (0.7PB 9.2/0.4)	Plastic, MUNSELL (0.7PB 9.2/0.4)	Plastic, MUNSELL (0.7PB 9.2/0.4)
External dimension H × W × D	mm	299 × 773 × 237	299 × 773 × 237	299 × 773 × 237	299 × 773 × 237	299 × 898 × 237
	in.	11-25/32 x 30-7/16 x 9-11/32	11-25/32 x 30-7/16 x 9-11/32	11-25/32 x 30-7/16 x 9-11/32	11-25/32 x 30-7/16 x 9-11/32	11-25/32 x 35-3/8 x 9-11/32
Net weight	kg (lbs)	11 (25)	11 (25)	11 (25)	11 (25)	13 (29)
Heat exchanger	Cross fin (Aluminum fin and copper tube)					
FAN	Water Volume L	0.6	0.6	0.7	0.7	1.0
	Type x Quantity	Line flow fan x 1	Line flow fan x 1	Line flow fan x 1	Line flow fan x 1	Line flow fan x 1
	External static press. Pa	0	0	0	0	0
Motor Type	mmH ₂ O	0	0	0	0	0
	Motor output kW	DC motor 0.030	DC motor 0.030	DC motor 0.030	DC motor 0.030	DC motor 0.030
	Driving mechanism	Direct-driven by motor (Low-Mid2-Mid1-High)	Direct-driven by motor (Low-Mid2-Mid1-High)	Direct-driven by motor (Low-Mid2-Mid1-High)	Direct-driven by motor (Low-Mid2-Mid1-High)	Direct-driven by motor (Low-Mid2-Mid1-High)
Air flow rate	m ³ /min	3.3 - 3.8 - 4.1 - 4.5	3.3 - 3.8 - 4.3 - 4.9	4.0 - 5.0 - 6.0 - 7.0	4.0 - 5.4 - 7.0 - 8.4	6.3 - 7.6 - 9.0 - 10.4
	L/s	55-63-68-75	55-63-72-82	67-83-100-117	67-90-117-140	105-127-150-173
	cfm	117-134-145-159	117-134-152-173	141-177-212-247	141-191-247-297	222-268-318-367
Sound pressure level (measured in anechoic room)	dB <A>	(Low-Mid2-Mid1-High) 22-26-28-30	(Low-Mid2-Mid1-High) 22-26-29-32	(Low-Mid2-Mid1-High) 22-28-33-36	(Low-Mid2-Mid1-High) 22-30-36-41	(Low-Mid2-Mid1-High) 29-34-38-41
Insulation material	Polyethylene sheet					
Air filter	PP Honeycomb					
Protection device	Fuse					
Connectable HBC	CMB-WM-V-AA, CMB-WM-F-AA, CMB-WM-V-BB					
Water piping diameter *3 *4	Connection size	Rc 3/4 screw	Rc 3/4 screw	Rc 3/4 screw	Rc 3/4 screw	Rc 3/4 screw
	Inlet	Rc 3/4 screw	Rc 3/4 screw	Rc 3/4 screw	Rc 3/4 screw	Rc 3/4 screw
	Outlet	20	20	20	20	20
Field drain pipe size	Inlet	20	20	20	20	20
	Outlet	20	20	20	20	20
	mm I.D.	I.D.16 (5/8)	I.D.16 (5/8)	I.D.16 (5/8)	I.D.16 (5/8)	I.D.16 (5/8)
Optional parts	Drain pump kit	PAC-SL48DM-E	PAC-SL48DM-E	PAC-SL48DM-E	PAC-SL48DM-E	PAC-SL48DM-E
	Valve kit	PAC-SK35VK-E	PAC-SK35VK-E	PAC-SK35VK-E	PAC-SK35VK-E	PAC-SK35VK-E
	6m Lead wire	PAC-SK40LW-E	PAC-SK40LW-E	PAC-SK40LW-E	PAC-SK40LW-E	PAC-SK40LW-E
Attachment plate	PAC-SK39AP-E	PAC-SK39AP-E	PAC-SK39AP-E	PAC-SK39AP-E	PAC-SK39AP-E	

Notes :

- Nominal cooling conditions Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B. (95°F D.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Be sure to install a valve on the water outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters.
- Certain restrictions apply to indoor unit combinations. Refer to the section on the valve kit in the chapter "OPTIONAL PARTS" in the DATA BOOK for the restrictions. When the valve kit is installed farther away from the HBC than

the distance between the HBC and the WL-model indoor unit, the maximum allowable height difference between the HBC and the valve kit is 15 meters. The maximum allowable piping length between the indoor unit and the valve kit is 5 meters.

*Please group units that operate on 1 branch.

*Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.

*Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU/h = kW x 3.412
 cfm = m³/min x 35.31
 lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.

Wall Mounted



Model		PKFY-WL40VLM-E	PKFY-WL50VKM-E	PKFY-WL63VKM-E	PKFY-WL80VKM-E
Power source		1-phase 220-240 V 50 Hz, 1-phase 220 V 60 Hz			
Cooling capacity (Nominal)	*1 kW	4.5	5.6	7.1	9.0
	*1 BTU/h	15,400	19,100	24,200	30,700
Power input	kW	0.05	0.04	0.05	0.07
	A	0.45	0.46	0.56	0.76
Heating capacity (Nominal)	*2 kW	5.0	6.3	8.0	10.0
	*2 BTU/h	17,100	21,500	27,300	34,100
Power input	kW	0.04	0.04	0.05	0.07
	A	0.40	0.40	0.50	0.70
External finish		Plastic, MUNSELL (0.7PB 9.2/0.4)	Plastic, MUNSELL (0.7PB 9.2/0.4)	Plastic, MUNSELL (0.7PB 9.2/0.4)	Plastic, MUNSELL (0.7PB 9.2/0.4)
External dimension H x W x D		mm	299 x 898 x 237	365 x 1170 x 295	365 x 1170 x 295
		in.	11-25/32 x 35-3/8 x 9-11/32	14-3/8 x 46-1/16 x 11-5/8	14-3/8 x 46-1/16 x 11-5/8
Net weight		kg (lbs)	13 (29)	20 (44)	20 (44)
Heat exchanger		Cross fin (Aluminum fin and copper tube)			
FAN	Water Volume	L	1.1	2.0	2.0
	Type x Quantity	Line flow fan x 1		Line flow fan x 1	Line flow fan x 1
External static press.	Pa	0	0	0	0
	mmH ₂ O	0	0	0	0
Motor Type		DC motor		DC motor	DC motor
Motor output		0.030 kW		0.069 kW	0.069 kW
Driving mechanism		Direct-driven by motor		Direct-driven by motor	Direct-driven by motor
Air flow rate		(Low-Mid2-Mid1-High)		(Low-High)	(Low-High)
		m ³ /min	6.4 - 8.2 - 10.0 - 11.9	18-20	18-22
Sound pressure level (measured in anechoic room)		(Low-Mid2-Mid1-High)		(Low-High)	(Low-High)
		dB <A>	30-36-41-45	39-42	39-45
Insulation material		Polyethylene sheet		Polyethylene sheet	Polyethylene sheet
Air filter		PP Honeycomb		PP Honeycomb	PP Honeycomb
Protection device		Fuse		Fuse	Fuse
Connectable HBC		CMB-WM-V-AA, CMB-WM-F-AA, CMB-WM-V-BB			
Water piping diameter *3 *4	Connection size	Inlet in.	Rc 3/4 screw	Rc 3/4 screw	Rc 1-1/4 screw
	Outlet	in.	Rc 3/4 screw	Rc 3/4 screw	Rc 1-1/4 screw
Field pipe size	Inlet	mm I.D.	20	20	30
	Outlet	mm I.D.	20	20	30
Field drain pipe size		mm (in.)	I.D.16 (5/8)	I.D.16 (5/8)	I.D.16 (5/8)
Optional parts		Drain pump kit	PAC-SL48DM-E	PAC-SL48DM-E	PAC-SL48DM-E
		Valve kit	PAC-SK35VK-E	PAC-SK35VK-E	PAC-SK35VK-E
		6m Lead wire	PAC-SK40LW-E	PAC-SK40LW-E	PAC-SK40LW-E
		Attachment plate	PAC-SK39AP-E	PAC-SK39AP-E	PAC-SK39AP-E

Notes :

- Nominal cooling conditions Indoor: 27°C D.B./19°C W.B. (81°F D.B./66 °F W.B.), Outdoor: 35°C D.B. (95°F D.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Be sure to install a valve on the water outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters.
- Certain restrictions apply to indoor unit combinations. Refer to the section on the valve kit in the chapter "OPTIONAL PARTS" in the DATA BOOK for the restrictions. When the valve kit is installed farther away from the HBC than

the distance between the HBC and the WL-model indoor unit, the maximum allowable height difference between the HBC and the valve kit is 15 meters. The maximum allowable piping length between the indoor unit and the valve kit is 5 meters.

*Please group units that operate on 1 branch.

*Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual.


*Due to continuing improvement, above specifications may be subject to change without notice.

Unit Converter

BTU / h = kW x 3,412
 cfm = m³ / min x 35.31
 lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.

Floor Standing Concealed

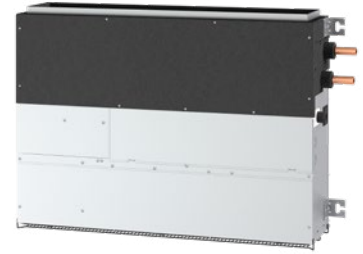

Model		PFFY-WL20VCM-A		PFFY-WL25VCM-A		PFFY-WL32VCM-A		
Power source		1-phase 220-230-240 V 50/60 Hz		1-phase 220-230-240 V 50/60 Hz		1-phase 220-230-240 V 50/60 Hz		
Cooling capacity (Nominal)	*1 kW	2.2		2.8		3.6		
	*1 BTU/h	7,500		9,600		12,300		
*2 Power input	kW	0.022		0.029		0.035		
	A	0.25-0.24-0.23		0.33-0.32-0.30		0.38-0.36-0.35		
Heating capacity (Nominal)	*3 kW	2.5		3.2		4.0		
	*3 BTU/h	8,500		10,900		13,600		
*2 Power input	kW	0.022		0.029		0.035		
	A	0.25-0.24-0.23		0.33-0.32-0.30		0.38-0.36-0.35		
External finish		Galvanized steel plate		Galvanized steel plate		Galvanized steel plate		
External dimension H × W × D	*4 mm	615 (690) × 700 × 200		615 (690) × 700 × 200		615 (690) × 700 × 200		
	*4 in.	24-1/4 (27-3/16) × 27-9/16 × 7-7/8		24-1/4 (27-3/16) × 27-9/16 × 7-7/8		24-1/4 (27-3/16) × 27-9/16 × 7-7/8		
Net weight		18 (40)		18 (40)		18.5 (42)		
Heat exchanger		Cross fin (Aluminum fin and copper tube)		Cross fin (Aluminum fin and copper tube)		Cross fin (Aluminum fin and copper tube)		
FAN	Water Volume	0.8		0.8		1.0		
	Type x Quantity	Sirocco fan × 2		Sirocco fan × 2		Sirocco fan × 2		
*5 External static press.	Pa	<0> - 10 - <40> - <60>		<0> - 10 - <40> - <60>		<0> - 10 - <40> - <60>		
	mmH ₂ O	<0.0> - 1.0 - <4.1> - <6.1>		<0.0> - 1.0 - <4.1> - <6.1>		<0.0> - 1.0 - <4.1> - <6.1>		
Motor Type		DC motor		DC motor		DC motor		
Motor output		0.096		0.096		0.096		
Driving mechanism		Direct-driven by motor		Direct-driven by motor		Direct-driven by motor		
Air flow rate	(Low-Mid-High)							
	m ³ /min	5.0 - 6.0 - 7.0		5.5 - 7.0 - 8.5		6.5 - 7.5 - 9.0		
	L/s	83 - 100 - 117		92 - 117 - 142		108 - 125 - 150		
cfm		177 - 212 - 247		194 - 247 - 300		230 - 265 - 318		
Sound pressure level (measured in anechoic room)		(Low-Mid-High) 21.0-23.0-26.0		(Low-Mid-High) 22.0-26.0-30.0		(Low-Mid-High) 25.0-28.0-32.0		
Insulation material				Polystyrene foam, Polyethylene foam, Urethane foam				
Air filter		PP honeycomb fabric.		PP honeycomb fabric.		PP honeycomb fabric.		
Protection device		Fuse		Fuse		Fuse		
Connectable HBC/Hydro unit				CMB-WM-V-AA, CMB-WM-FAA, CMB-WM-V-BB/CMH-WM-A				
Water piping diameter	*6 *7 Connection size	Inlet	22		22		22	
		Outlet	22		22		22	
	Field pipe size	Inlet	20		20		20	
		Outlet	20		20		20	
Field drain pipe size		mm (in.) O.D.32 (1-1/4)		mm (in.) O.D.32 (1-1/4)		mm (in.) O.D.32 (1-1/4)		
Standard attachment		Document Accessory		Installation Manual, Instruction Book Washer, Drain hose, Tie band, Leg, Screw		Installation Manual, Instruction Book Washer, Drain hose, Tie band, Leg, Screw		

Model		PFFY-WL40VCM-A		PFFY-WL50VCM-A		
Power source		1-phase 220-230-240 V 50/60 Hz		1-phase 220-230-240 V 50/60 Hz		
Cooling capacity (Nominal)	*1 kW	4.5		5.6		
	*1 BTU/h	15,400		19,100		
*2 Power input	kW	0.038		0.062		
	A	0.38-0.36-0.35		0.52-0.50-0.46		
Heating capacity (Nominal)	*3 kW	5.0		6.3		
	*3 BTU/h	17,100		21,500		
*2 Power input	kW	0.038		0.062		
	A	0.38-0.36-0.35		0.52-0.50-0.46		
External finish		Galvanized steel plate		Galvanized steel plate		
External dimension H × W × D	*4 mm	615 (690) × 900 × 200		615 (690) × 900 × 200		
	*4 in.	24-1/4 (27-3/16) × 35-7/16 × 7-7/8		24-1/4 (27-3/16) × 35-7/16 × 7-7/8		
Net weight		22.5 (51)		22.5 (51)		
Heat exchanger		Cross fin (Aluminum fin and copper tube)		Cross fin (Aluminum fin and copper tube)		
FAN	Water Volume	1.3		1.3		
	Type x Quantity	Sirocco fan × 3		Sirocco fan × 3		
*5 External static press.	Pa	<0> - 10 - <40> - <60>		<0> - 10 - <40> - <60>		
	mmH ₂ O	<0.0> - 1.0 - <4.1> - <6.1>		<0.0> - 1.0 - <4.1> - <6.1>		
Motor Type		DC motor		DC motor		
Motor output		0.096		0.096		
Driving mechanism		Direct-driven by motor		Direct-driven by motor		
Air flow rate	(Low-Mid-High)					
	m ³ /min	8.0 - 9.5 - 11.0		10.5 - 12.5 - 14.5		
	L/s	133 - 158 - 183		175 - 208 - 242		
cfm		282 - 335 - 388		371 - 441 - 512		
Sound pressure level (measured in anechoic room)		(Low-Mid-High) 25.0-27.0-30.0		(Low-Mid-High) 28.0-32.0-35.0		
Insulation material		Polystyrene foam, Polyethylene foam, Urethane foam		Polystyrene foam, Polyethylene foam, Urethane foam		
Air filter		PP honeycomb fabric.		PP honeycomb fabric.		
Protection device		Fuse		Fuse		
Connectable HBC/Hydro unit				CMB-WM-V-AA, CMB-WM-FAA, CMB-WM-V-BB/CMH-WM-A		
Water piping diameter	*6 *7 Connection size	Inlet	22		22	
		Outlet	22		22	
	Field pipe size	Inlet	20		20	
		Outlet	20		20	
Field drain pipe size		mm (in.) O.D.32 (1-1/4)		mm (in.) O.D.32 (1-1/4)		
Standard attachment		Document Accessory		Installation Manual, Instruction Book Washer, Drain hose, Tie band, Leg, Screw		

Notes :

- Nominal cooling conditions Indoor: 27°CDB./19°CWB. (81°FDB./66°FWB.), Outdoor: 35°CDB. (95°FDB.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- The values are measured at the factory setting of external static pressure.
- Nominal heating conditions Indoor: 20°CDB. (68°FDB.), Outdoor: 7°CDB. (45°FDB./43°FWB.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- The height that includes the duct flange is 638 (713) mm. The values in () show the height of unit with leg.

- The factory setting of external static pressure is shown without < >. Refer to "Fan characteristics curves", according to the external static pressure, in DATA BOOK for the usable range of air flow rate.
- Be sure to install a valve on the water inlet/outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters.
- Please group units that operate on 1 branch of HBC controller.

Unit Converter

BTU / h = kW × 3.412
cfm = m³ / min × 35.31
lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.

Floor Standing Exposed



Model				PFFY-WL20VEM-A	PFFY-WL25VEM-A	PFFY-WL32VEM-A
Power source				1-phase 220-230-240 V 50/60 Hz		
Cooling capacity (Nominal)	*1	kW		2.2	2.8	3.6
	*1	BTU/h		7,500	9,600	12,300
	Power input	kW		0.021	0.029	0.036
Heating capacity (Nominal)	*2	kW		2.5	3.2	4.0
	*2	BTU/h		8,500	10,900	13,600
	Power input	kW		0.021	0.029	0.036
	Current input	A		0.26-0.25-0.24	0.34-0.33-0.31	0.40-0.39-0.37
External finish				Galvanized steel plate, MUNSELL (1.0Y 9.2/0.2)/ABS, MUNSELL (5.32GY 8.75/0.37)		
External dimension H × W × D				669 (726) × 1,142 × 217		
*3				26-3/8 (28-5/8) × 45 × 8-9/16		
Net weight				29.5 (67)		
Heat exchanger				Cross fin (Aluminum fin and copper tube)		
Water Volume				0.8		
FAN				Sirocco fan × 2		
Type x Quantity				Sirocco fan × 2		
External static press.				0		
Motor Type				DC motor		
Motor output				0.096		
Driving mechanism				Direct-driven by motor		
Air flow rate				(Low-Mid-High)		
				m ³ /min		
				L/s		
				cfm		
Sound pressure level (measured in anechoic room)				23.0-27.0-31.0		
Insulation material				Polystyrene foam, Polyethylene foam, Urethane foam		
Air filter				PP honeycomb fabric.		
Protection device				Fuse		
Connectable HBC/Hydro unit				CMB-WM-V-AA, CMB-WM-FAA, CMB-WM-V-BB/CMH-WMV-A		
Water piping diameter				22		
*4 *5				22		
Field pipe size				20		
Field drain pipe size				20		
Standard attachment				Installation Manual, Instruction Book		
Accessory				Washer, Drain hose, Tie band, Leg, Leg cover, M4 screw, M5 screw		

Model				PFFY-WL40VEM-A	PFFY-WL50VEM-A
Power source				1-phase 220-230-240 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW		4.5	5.6
	*1	BTU/h		15,400	19,100
	Power input	kW		0.037	0.064
Heating capacity (Nominal)	*2	kW		5.0	6.3
	*2	BTU/h		17,100	21,500
	Power input	kW		0.037	0.064
	Current input	A		0.39-0.38-0.36	0.68-0.65-0.63
External finish				Galvanized steel plate, MUNSELL (1.0Y 9.2/0.2)/ABS, MUNSELL (5.32GY 8.75/0.37)	
External dimension H × W × D				669 (726) × 1,342 × 217	
*3				26-3/8 (28-5/8) × 52-7/8 × 8-9/16	
Net weight				35 (78)	
Heat exchanger				Cross fin (Aluminum fin and copper tube)	
Water Volume				1.3	
FAN				Sirocco fan × 3	
Type x Quantity				Sirocco fan × 3	
External static press.				0	
Motor Type				DC motor	
Motor output				0.096	
Driving mechanism				Direct-driven by motor	
Air flow rate				(Low-Mid-High)	
				m ³ /min	
				L/s	
				cfm	
Sound pressure level (measured in anechoic room)				29.0-33.0-36.0	
Insulation material				Polystyrene foam, Polyethylene foam, Urethane foam	
Air filter				PP honeycomb fabric.	
Protection device				Fuse	
Connectable HBC/Hydro unit				CMB-WM-V-AA, CMB-WM-FAA, CMB-WM-V-BB/CMH-WMV-A	
Water piping diameter				22	
*4 *5				22	
Field pipe size				20	
Field drain pipe size				20	
Standard attachment				Installation Manual, Instruction Book	
Accessory				Washer, Drain hose, Tie band, Leg, Leg cover, M4 screw, M5 screw	

Notes :

- Nominal cooling conditions Indoor: 27°CDB./19°CWB. (81°FDB./66°FWB.), Outdoor: 35°CDB. (95°FDB.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Nominal heating conditions Indoor: 20°CDB. (68°FDB.), Outdoor: 7°CDB. (45°FDB./43°FWB.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- The values in () show the height of unit with leg.
- Be sure to install a valve on the water inlet/outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters.
- Please group units that operate on 1 branch of HBC controller.

Unit Converter

BTU / h	= kW x 3,412
cfm	= m ³ / min x 35.31
lbs	= kg / 0.4536

^ Above specification data is subject to rounding variation.

Under Ceiling



Model			PCFY-WL40VKM-E	PCFY-WL63VKM-E	PCFY-WL80VKM-E	PCFY-WL100VKM-E
Power source			1-phase 220-240V 50Hz, 1-phase 220V 60Hz			
Cooling capacity (Nominal)	*1	kW	4.5	7.1	9.0	11.2
	*1	BTU/h	15,400	24,200	38,200	47,800
	*2	Power input kW	0.04	0.06	0.08	0.11
Heating capacity (Nominal)	*2	Current input A	0.34	0.52	0.69	0.95
	*3	kW	5.0	8.0	10.0	12.5
	*3	BTU/h	17,100	27,300	42,700	54,600
	*2	Power input kW	0.04	0.06	0.08	0.11
	*2	Current input A	0.34	0.52	0.69	0.95
External finish			MUNSELL (6.4Y 8.9/0.4)			
External dimension H x W x D			mm	230×960×680	230×1280×680	230×1600×680
			in.	9-1/16×37-13/16×26-3/4	9-1/16×50-3/8×26-3/4	9-1/16×63×26-3/4
Net weight			kg (lbs)	25 (55)	32 (71)	39 (86)
Heat exchanger			Cross fin (Aluminum fin and copper tube)			
FAN			Water Volume L			
Type x Quantity			Sirocco fan x 2			
External static press.			Pa			
Motor Type			DC motor			
Driving mechanism			Direct-driven by motor			
Air flow rate			(Low-Mid2-Mid1-High)			
Sound pressure level (measured in anechoic room)			*2 dB <A>			
Insulation material			Polyester sheet			
Air filter			PP honeycomb			
Protection device			Fuse			
Connectable HBC/Hydro unit			CMB-WM-V-AA, CMB-WM-V- AB/CMH-WM-V-A			
Water piping diameter			mm O.D.			
Connection size			22			
Field pipe size			mm I.D.			
Field drain pipe size			mm (in.)			
Standard attachment			Installation Manual, Instruction book			
Optional parts			PAC-SH88KF-E			
High efficiency filter			PAC-SH89KF-E			
Wireless remote controller kit			PAR-SL94B-E			
Anti-allergy enzyme filter			PAC-SK48KF-E			
V Blocking filter			PAC-SK55KF-E			
Wired remote controller kit			PAR-41MAA			
Valve kit			*6 PAC-SK35VK-E			
6m Lead wire			PAC-SK40LW-E			
Attachment plate			PAC-SK39AP-E			

Notes :

- Nominal cooling conditions Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B. (95°F D.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- The values are measured at the factory setting of external static pressure.
- Nominal heating conditions Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.).
- Be sure to install a valve on the water inlet/outlet.
- Install a strainer (40 mesh or more) on the pipe next to the valve to remove the foreign matters.

- Certain restrictions apply to indoor unit combinations. Refer to the section on the valve kit in the chapter "OPTIONAL PARTS" in the DATA BOOK for the restrictions. When the valve kit is installed farther away from the HBC than the distance between the HBC and the WL-model indoor unit, the maximum allowable height difference between the HBC and the valve kit is 15 meters. The maximum allowable piping length between the indoor unit and the valve kit is 5 meters.
- Please group units that operate on 1 branch of HBC controller.

Unit Converter

BTU/h = kW x 3.412
 cfm = m³/min x 35.31
 lbs = kg / 0.4536

^ Above specification data is subject to rounding variation.



Black Diamond Technologies and Mitsubishi Electric – an Exclusive Partnership Since 1981

The Mitsubishi Electric Product Range has been exclusively distributed by 100% locally owned and operated Black Diamond Technologies Limited for over 40 years in New Zealand.

The combination of an internationally trusted brand with the comfort of a locally owned and operated company means that you will always get the best products, the best local service and the best local support.

Based in Wellington with a further 4 support offices throughout New Zealand, Black Diamond Technologies Limited is here to help.

Our Vision – Creating New Zealand's Sustainable Future


Black Diamond Technologies Limited in partnership with Mitsubishi Electric, strives to develop and introduce new technologies for New Zealanders that will make our lives more comfortable while creating a greener tomorrow.

Peace of Mind Commissioning and Maintenance Services

The Black Diamond Technologies Limited commissioning service is carried out in-house by our team of technical staff. Having attended specialised product training, they are the most equipped, qualified and experienced technicians in New Zealand to evaluate Mitsubishi Electric commercial installations.

In addition, Black Diamond Technologies Limited offer maintenance services during and after the warranty period. Our specialised team can help with a high-level annual health check using specialised factory system integration tools to ensure superior performance, reliability and ultimate peace of mind for clients.

Please contact your Applied Products Sales Representative for more information.

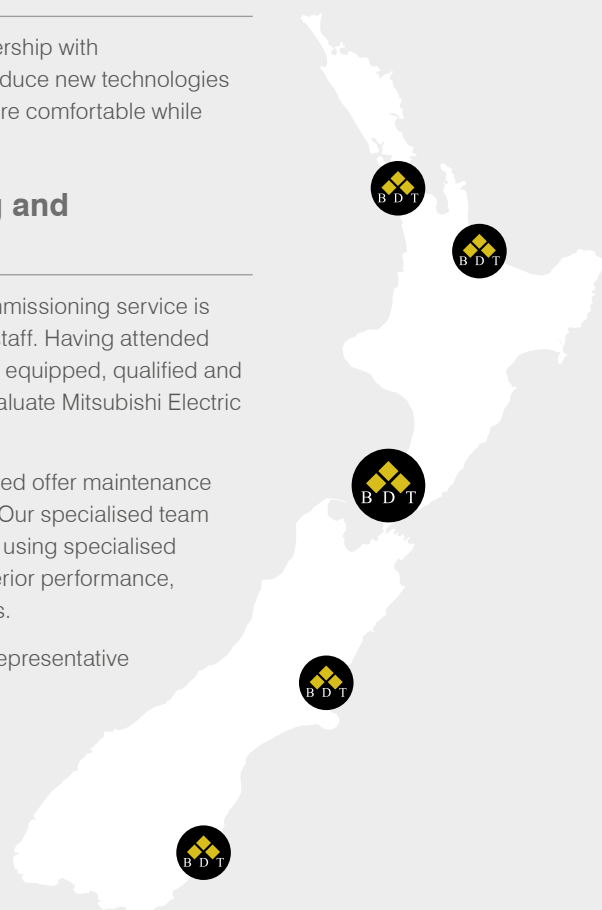

For more information please visit our website
or call our Applied Products Sales Team.
mitsubishi-electric.co.nz | 0800 784 382

PUBLISHED JUL 2025

 PLEASE LOOK AFTER THE ENVIRONMENT AND RECYCLE