

shockproof solar panel

specification sheet

Application : solar panel for 12 V batteries

Power : 6.75 W

Operating voltage (Vmpp) : 15 V *

Operating current (Impp) : 450 mA *

Open circuit voltage (Voc) : 23 V *

Short circuit current (Isc) : 600 mA *

Dimensions : 350 mm x 695 mm

Active area : 278 mm x 605 mm

Thickness : 2 mm


Temperature operating range : -20°C to +60°C

Weight : 720 g

Connector : AMP Superseal 1.5 series IP67

Compatible accessory : solar charge controllers

CE Approval

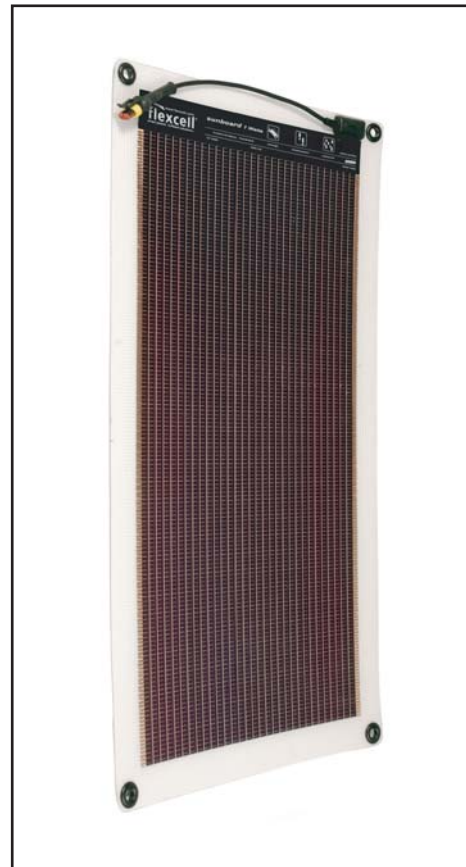

* measured at Standard Testing Conditions (STC), 1000W/m², AM 1.5, 25°C

sunboard 3 years warranty
 solar energy for batteries



semirigid



shockresistant



waterproof



3m cable (included)



charge controller (not included)



battery (not included)

AM/FM radio

standard GPS

fish finder

2-ways radio

satellite phone

professional GPS

lead acid battery for solar lights

7W	15 VDC	450 mA	/ battery capacity (mAh) :	600	900	1500	2000	4000	8000
charging time in hours (measured in full sunshine)				1h20	2h00	3h20	4h30	9h00	18h00
				to maintain 12 Volt batteries					